



**PRICE LIST**  
**JAN' 2026**

**BE THE SOURCE**






## BE THE SOURCE

Since 1978 Precision Pipes has been one of India's leading manufacturers in Electrical & Plumbing Piping Systems and continue to be the source of carrying electricity and water safely into homes and work spaces across the world. Today we take our first step towards Lighting. Precision is now the source for Lighting Systems.

Light is the source of life. With Precision LED Lighting Systems, we wish to inspire and empower our patrons to look at lighting in a creative way. We want your spaces to come alive.

Light up your imagination and get ready to explore endless possibilities. It's time to paint with light!

**Kunal S. Kadakia**



**IT'S NOT WHAT YOU SEE,  
IT'S HOW YOU SEE IT.**

# C O N T E N T S

**SIRIUS**  
HIGH BEAM LED BULBS

**01**

**ATRIA**  
HIGH POWER LED BULBS

**02**

**NEUTRONSTAR**  
INVERTER LED BULBS

**03**

**REGULUS**  
LED BATTENS

**04**

**SAIPH**  
LED PANEL LIGHTS

**05 - 06**

**TRIANGULUM**  
LED PANEL LIGHTS

**07**

**PEGASUS**  
LED PANEL LIGHTS

**08**

**TAYGETA**  
TWIN COLOUR LED PANEL LIGHTS

**09**

**CARINA**  
SURFACE LED PANEL LIGHTS

**10**

**ALNILAM**  
AL LED PANEL LIGHTS

**11 - 12**

**POLLUX**  
2X2 LED PANEL LIGHTS

**13**

**APUSTAR**  
LED JUNCTION DOWNLIGHTS

**14 - 18**

**BELLATRIX**  
LED SPOTLIGHTS

**19 - 20**

**ALNITAK**  
COB LED SPOTLIGHTS

**21 - 25**

**VELORUM**  
DECORATIVE LED LIGHTS

**26 - 27**

**CENTAURUS**  
LED STREET LIGHTS

**28 - 29**

**MINTAKA**  
LED FLOOD LIGHTS

**30 - 32**

**PROCYON**  
LED HIGHBAY LIGHTS

**33 - 34**

# SIRIUS

## HIGH BEAM LED BULBS



**7W | LP(₹) 112.00**

**Product Code:** PPI-SRS-7W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 700 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 60 (Dia) x 105 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 100 Units

**9W | LP(₹) 116.00**

**Product Code:** PPI-SRS-9W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 900 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 60 (Dia) x 105 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 100 Units

**10W | LP(₹) 116.00**

**Product Code:** PPI-SRS-10W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1000 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 60 (Dia) x 105 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 100 Units

**12W | LP(₹) 190.00**

**Product Code:** PPI-SRS-12W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1200 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 65 (Dia) x 125 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 50 Units

**15W | LP(₹) 274.00**

**Product Code:** PPI-SRS-15W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1500 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 70 (Dia) x 135 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 50 Units

**18W | LP(₹) 376.00**

**Product Code:** PPI-SRS-18W-HBB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1800 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 80 (Dia) x 152 (H) mm  
**Base Holder :** B22  
**Master Pkg. :** 50 Units

- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- DOB TECHNOLOGY
- OVERHEATING PROTECTION
- 3 TIMES MORE LIFE OVER CFL



**ATRIA**  
HIGH POWER LED BULBS



COOL WHITE  
(6500K)



WARM WHITE  
(3000K)



NEUTRAL WHITE  
(4000K)



BIS APPROVED

IP20

RoHS



1 YEAR WARRANTY



**20W | LP(₹)460.00**

**Product Code:** PPI-ATA-20W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 2000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 80 (Dia) x 135 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 50 Units

**30W | LP(₹)640.00**

**Product Code:** PPI-ATA-30W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 3000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 100 (Dia) x 175 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 20 Units



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



DOB TECHNOLOGY



OVERHEATING PROTECTION



BRIGHT LIGHT OUTPUT

**40W | LP(₹)840.00**

**Product Code:** PPI-ATA-40W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 4000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 120 (Dia) x 200 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 20 Units

**50W | LP(₹)1040.00**

**Product Code:** PPI-ATA-50W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 5000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 140 (Dia) x 225 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 20 Units



30W



40W



50W

# NEUTRONSTAR

## INVERTER LED BULBS



WARRANTY  
**1 YEAR**  
WARRANTY

- LI-ION RECHARGEABLE BATTERY
- IP20
- RoHS
- 
- 
- 



### 9W | LP(₹)880.00

**Product Code:** PPI-NTS-9W-INB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 945 Lumens (AC Mode)  
**Efficacy:** 105 lm/W (AC Mode)  
**Charge Time:** 4-5 Hrs (Max)  
**Product Size:** 70 (Dia) x 140 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 50 Units  
**Bulb Backup:** 3 Mode Dimming

### 3 STEP DIMMING WHILE TOGGLE SWITCH

- CLICK ONCE**  
FOR HIGH LUMENS
- CLICK TWICE**  
FOR MEDIUM LUMENS
- CLICK THRICE**  
FOR LOW LUMENS

<b>MODE 1</b>  <b>4HRS</b> <b>350 LUMENS</b>	<b>MODE 2</b>  <b>6HRS</b> <b>200 LUMENS</b>	<b>MODE 3</b>  <b>8HRS</b> <b>100 LUMENS</b>
---	---	---

### 10W | LP(₹)620.00

**Product Code:** PPI-NTS-10W-INB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V, 50Hz  
**Lumens:** 1000 Lumens (AC Mode)  
**DC Lumens:** 350 Lumens (DC Mode)  
**Efficacy:** 100 lm/W (AC Mode)  
**Charge Time:** 8-10 Hrs (Max)  
**Product Size:** 70 (Dia) x 140 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 50 Units  
**Bulb Backup:** Up to 4 Hrs

### 12W | LP(₹)1100.00

**Product Code:** PPI-NTS-12W-INB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 1260 Lumens (AC Mode)  
**Efficacy:** 105 lm/W (AC Mode)  
**Charge Time:** 5-6 Hrs (Max)  
**Product Size:** 70 (Dia) x 145 (H) mm  
**Base Holder:** B22  
**Master Pkg.:** 50 Units  
**Bulb Backup:** 3 Mode Dimming

<b>MODE 1</b>  <b>4HRS</b> <b>350 LUMENS</b>	<b>MODE 2</b>  <b>7HRS</b> <b>250 LUMENS</b>	<b>MODE 3</b>  <b>9HRS</b> <b>150 LUMENS</b>
---	---	---

- 90%**  
ENERGY SAVINGS
- 105 LUMENS PER WATT - AC MODE**
- 180°**  
WIDE BEAM ANGLE
- QUICK CHARGING**
- CRI > 80**  
EXCELLENT CRI
- 4KV**  
SURGE PROTECTION
- 250V**  
OVER VOLTAGE PROTECTION
- AUTOMATIC CHARGE MODE ON WHEN POWER CUT**
- OVER CHARGE & DEEP BATTERY DISCHARGE PROTECTION**
- AUTOMATIC BATTERY CHARGE WHEN POWER ON**



# REGULUS LED BATTENS



1 YEAR  
WARRANTY



36W

40W

50W

12W

20W

40W

## 12W | LP(₹)265.00

**Product Code:** PPI-RGS-12W-LBN  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1200 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 590 (L) x 23 (W) x 29 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 50 Units

## 20W | LP(₹)295.00

**Product Code:** PPI-RGS-20W-LBN  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 2000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 1100 (L) x 23 (W) x 29 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 40 Units

## 40W | LP(₹)785.00

**Product Code:** PPI-RGS-40W-LBN  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 4000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 1180 (L) x 30 (W) x 38 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 25 Units

## 36W | LP(₹)750.00


**(MUSHROOM)**  
**Product Code:** PPI-RGS-36W-MLB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 3600 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 1180 (L) x 30 (W) x 40 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 25 Units

## 40W | LP(₹)1115.00

**(HIGH POWER)**  
**Product Code:** PPI-RGS-40W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 4000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 1200 (L) x 30 (W) x 38 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 20 Units

## 50W | LP(₹)1640.00

**(HIGH POWER)**  
**Product Code:** PPI-RGS-50W-HPB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 5000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 1200 (L) x 60 (W) x 40 (H)mm  
**End Cap:** Grey  
**Master Pkg.:** 20 Units

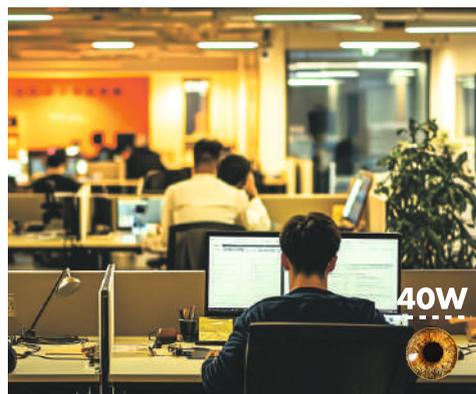

# SAIPH

## BACKLITE LED PANEL LIGHTS



2 YEARS WARRANTY



### 10W | LP(₹)420.00


**Product Code:** PPI-SIP-10W-BPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1000 Lumens  
**Efficacy:** 100 lm/W  
**Round Size:** 115 (Dia) x 35 (H) mm  
**Square Size:** 115 (L) x 115 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

### 15W | LP(₹)630.00

**Product Code:** PPI-SIP-15W-BPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1500 Lumens  
**Efficacy:** 100 lm/W  
**Round Size:** 145 (Dia) x 35 (H) mm  
**Square Size:** 145 (L) x 145 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

### 18W | LP(₹)730.00

**Product Code:** PPI-SIP-18W-BPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 100 lm/W  
**Round Size:** 165 (Dia) x 35 (H) mm  
**Square Size:** 165 (L) x 165 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

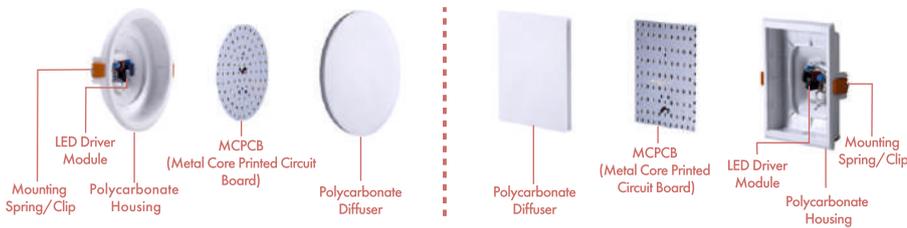

- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- ELEGANT DESIGN
- ANTIGLARE DIFFUSER
- HIGH QUALITY POLYCARBONATE BUILT

DIAMETER

**CUTOUT**

	10W	15W	18W
	Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")
	100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")



# SAIPH

## EDGE LITE LED PANEL LIGHTS



### 8W | LP(₹)465.00

**Product Code:** PPI-SIP-8W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 800 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 120 (Dia) x 25 (H) mm  
**Square Size :** 120 (L) x 120 (W) x 25 (H) mm  
**Master Pkg. :** 40 Units

### 12W | LP(₹)585.00

**Product Code:** PPI-SIP-12W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 1200 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 145 (Dia) x 25 (H) mm  
**Square Size :** 145 (L) x 145 (W) x 25 (H) mm  
**Master Pkg. :** 40 Units

### 15W | LP(₹)800.00

**Product Code:** PPI-SIP-15W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 1500 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 170 (Dia) x 25 (H) mm  
**Square Size :** 170 (L) x 170 (W) x 25 (H) mm  
**Master Pkg. :** 40 Units


### 20W | LP(₹)1000.00

**Product Code:** PPI-SIP-20W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 2000 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 220 (Dia) x 25 (H) mm  
**Square Size :** 220 (L) x 220 (W) x 25 (H) mm  
**Master Pkg. :** 40 Units

- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- ELEGANT DESIGN
- ANTIGLARE DIFFUSER
- HIGH QUALITY POLYCARBONATE BUILT

DIAMETER

CUTOUT			
8W	12W	15W	20W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")	Dia 200 mm (8")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")	200 (L) x 200 (W) mm (8")

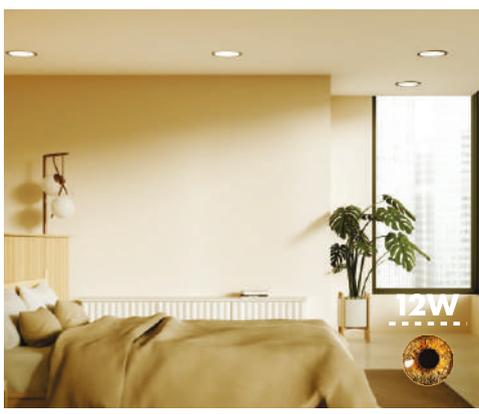

# TRIANGULUM

## TRICOLOUR BACKLITE LED PANEL LIGHTS



WARRANTY  
2 YEARS  
WARRANTY



### 10W | LP(₹)505.00

**Product Code:** PPI-TGM-10W-BPL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1000 Lumens (Cool White)  
**Efficacy:** 100 lm/W (Cool White)  
**Round Size:** 115 (Dia) x 35 (H) mm  
**Square Size:** 115 (L) x 115 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

### 15W | LP(₹)800.00

**Product Code:** PPI-TGM-15W-BPL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1500 Lumens (Cool White)  
**Efficacy:** 100 lm/W (Cool White)  
**Round Size:** 145 (Dia) x 35 (H) mm  
**Square Size:** 145 (L) x 145 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

### 18W | LP(₹) 1000.00

**Product Code:** PPI-TGM-18W-BPL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens (Cool White)  
**Efficacy:** 100 lm/W (Cool White)  
**Round Size:** 165 (Dia) x 35 (H) mm  
**Square Size:** 165 (L) x 165 (W) x 35 (H) mm  
**Master Pkg.:** 40 Units

3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



**CLICK ONCE** FOR COOL WHITE (6500K)  
**CLICK TWICE** FOR WARM WHITE (3000K)  
**CLICK THRICE** FOR NEUTRAL WHITE (4000K)



**CLICK ONCE** FOR COOL WHITE (6500K)  
**CLICK TWICE** FOR WARM WHITE (3000K)  
**CLICK THRICE** FOR NEUTRAL WHITE (4000K)

- 96% ENERGY SAVINGS
- 100 LUMENS PER WATT
- 120° WIDE BEAM ANGLE
- 50000hrs LONG LIFE
- CRI > 80 EXCELLENT CRI
- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- ELEGANT DESIGN
- 3 IN 1 LIGHTING APPLICATION
- HIGH QUALITY POLYCARBONATE BUILT

**CUTOUT**

DIAMETER		
10W	15W	18W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")

**Note:** \* Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



# PEGASUS

## NEO LED PANEL LIGHTS



### 6W | LP(₹)230.00

**Product Code:** PPI-PGS-6W-NRP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 540 Lumens  
**Efficacy :** 90 lm/W  
**Round Size :** 100 (Dia) x 27 (H) mm  
**Square Size :** 100 (L) x 100 (W) x 27 (H) mm  
**Master Pkg. :** 100 Units

### 12W | LP(₹)400.00

**Product Code:** PPI-PGS-12W-NRP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1080 Lumens  
**Efficacy :** 90 lm/W  
**Round Size :** 130 (Dia) x 27 (H) mm  
**Square Size :** 130 (L) x 130 (W) x 27 (H) mm  
**Master Pkg. :** 60 Units

### 15W | LP(₹)530.00

**Product Code:** PPI-PGS-15W-NRP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 1350 Lumens  
**Efficacy :** 90 lm/W  
**Round Size :** 155 (Dia) x 27 (H) mm  
**Square Size :** 155 (L) x 155 (W) x 27 (H) mm  
**Master Pkg. :** 60 Units

- ENERGY SAVINGS
- 90 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- DOB TECHNOLOGY
- ANTIGLARE DIFFUSER
- HIGH QUALITY POLYCARBONATE BUILT

**CUTOUT**



6W	12W	15W
Dia 75 mm (3")	Dia 100 mm (4")	Dia 125 mm (5")
75 (L) x 75 (W) mm (3")	100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")



# TAYGETA

## TWIN COLOUR LED PANEL LIGHTS



WARRANTY  
**2 YEARS**  
WARRANTY



### 3W+3W | LP(₹)450.00

**Product Code:** PPI-TGT-3W+3W-TCP  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** : 270 Lumens (Cool White)  
**Efficacy:** : 90 lm/W (Cool White)  
**Round Size:** : 105 (Dia) x 30 (H) mm  
**Square Size:** : 105 (L) x 105 (W) x 30 (H) mm  
**Master Pkg.:** : 60 Units

### 6W+6W | LP(₹)580.00

**Product Code:** PPI-TGT-6W+6W-TCP  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** : 540 Lumens (Cool White)  
**Efficacy:** : 90 lm/W (Cool White)  
**Round Size:** : 150 (Dia) x 32 (H) mm  
**Square Size:** : 150 (L) x 150 (W) x 32 (H) mm  
**Master Pkg.:** : 40 Units

### 12W+12W | LP(₹)880.00

**Product Code:** PPI-TGT-12W+12W-TCP  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** : 1080 Lumens (Cool White)  
**Efficacy:** : 90 lm/W (Cool White)  
**Round Size:** : 200 (Dia) x 35 (H) mm  
**Square Size:** : 200 (L) x 200 (W) x 35 (H) mm  
**Master Pkg.:** : 40 Units

- 96% ENERGY SAVINGS
- 90 LUMENS PER WATT (6500K)
- WIDE BEAM ANGLE 120°
- LONG LIFE 50000hrs
- EXCELLENT CRI > 80
- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION 4.50V
- 3 IN 1 LIGHTING APPLICATION
- TOGGLE SWITCH MECHANISM ON/OFF
- FLUCTUATION PROOF

**CUTOUT**



	3W+3W	6W+6W	12W+12W
●	Dia 70 mm	Dia 105 mm	Dia 155 mm
■	70 (L) x 70 (W) mm	105 (L) x 105 (W) mm	155 (L) x 155 (W) mm

**Note:** \*Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.



# CARINA

## RIMLESS SURFACE LED PANEL LIGHTS



### 8W | LP(₹)480.00

**Product Code:** PPI-CRN-8W-RSP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 720 Lumens  
**Efficacy:** 90 lm/W  
**Round Size:** 90 (Dia) x 28 (H) mm  
**Square Size:** 90 (L) x 90 (W) x 28 (H) mm  
**Master Pkg.:** 40 Units

### 15W | LP(₹)670.00

**Product Code:** PPI-CRN-15W-RSP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 1350 Lumens  
**Efficacy:** 90 lm/W  
**Round Size:** 120 (Dia) x 28 (H) mm  
**Square Size:** 120 (L) x 120 (W) x 28 (H) mm  
**Master Pkg.:** 40 Units

### 20W | LP(₹)820.00

**Product Code:** PPI-CRN-20W-RSP  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 90 lm/W  
**Round Size:** 155 (Dia) x 28 (H) mm  
**Square Size:** 155 (L) x 155 (W) x 28 (H) mm  
**Master Pkg.:** 40 Units

- 96% ENERGY SAVINGS
- 90 LUMENS PER WATT
- 120° WIDE BEAM ANGLE
- 25000+hrs LONG LIFE
- CRI > 80 EXCELLENT CRI
- 4KV SURGE PROTECTION
- 240V OVER VOLTAGE PROTECTION
- RD RIMLESS DESIGN
- ANTIGLARE DIFFUSER
- PC HIGH QUALITY POLYCARBONATE BUILT



# ALNILAM

## AL EDGELITE LED PANEL LIGHTS



### 8W | LP(₹)470.00

**Product Code:** PPI-ALM-8W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 800 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 120 (Dia) x 20 (H) mm  
**Square Size :** 120 (L) x 120 (W) x 20 (H) mm  
**Master Pkg. :** 40 Units

### 12W | LP(₹)615.00

**Product Code:** PPI-ALM-12W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V ~ 300V,50Hz  
**Lumens :** 1200 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 150 (Dia) x 20 (H) mm  
**Square Size :** 150 (L) x 150 (W) x 20 (H) mm  
**Master Pkg. :** 40 Units

### 15W | LP(₹)700.00

**Product Code:** PPI-ALM-15W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 1500 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 170 (Dia) x 20 (H) mm  
**Square Size :** 170 (L) x 170 (W) x 20 (H) mm  
**Master Pkg. :** 40 Units

### 18W | LP(₹)1000.00

**Product Code:** PPI-ALM-18W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V ~ 300V,50Hz  
**Lumens :** 1800 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 190 (Dia) x 20 (H) mm  
**Square Size :** 190 (L) x 190 (W) x 20 (H) mm  
**Master Pkg. :** 40 Units

### 22W | LP(₹)1130.00

**Product Code:** PPI-ALM-22W-EPL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 2200 Lumens  
**Efficacy :** 100 lm/W  
**Round Size :** 225 (Dia) x 20 (H) mm  
**Square Size :** 225 (L) x 225 (W) x 20 (H) mm  
**Master Pkg. :** 40 Units



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION




AL SLEEK DESIGN



ANTI GLARE DIFFUSER



HIGH GRADE ALUMINIUM BUILT



#### CUTOUT

	8W	12W	15W	18W	22W
● Dia	100 mm	135 mm	155 mm	175 mm	210 mm
■ Size	100 (L) x 100 (W) mm	135 (L) x 135 (W) mm	155 (L) x 155 (W) mm	175 (L) x 175 (W) mm	210 (L) x 210 (W) mm



8W



15W



18W

# ALNILAM

## AL DEEP DOWN LED PANEL LIGHTS



### 12W | LP(₹) 1290.00

**Product Code:** PPI-ALM-12W-ADD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens** : 1080 Lumens  
**Efficacy** : 90 lm/W  
**Round Size** : 120 (Dia) x 50 (H) mm  
**Square Size** : 120 (L) x 120 (W) x 50 (H) mm  
**Master Pkg.** : 20 Units

### 18W | LP(₹) 1565.00

**Product Code:** PPI-ALM-18W-ADD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens** : 1620 Lumens  
**Efficacy** : 90 lm/W  
**Round Size** : 155 (Dia) x 50 (H) mm  
**Square Size** : 155 (L) x 155 (W) x 50 (H) mm  
**Master Pkg.** : 20 Units


### 24W | LP(₹) 1900.00

**Product Code:** PPI-ALM-24W-ADD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens** : 2160 Lumens  
**Efficacy** : 90 lm/W  
**Round Size** : 175 (Dia) x 50 (H) mm  
**Square Size** : 175 (L) x 175 (W) x 50 (H) mm  
**Master Pkg.** : 20 Units

- ENERGY SAVINGS
- 90 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- ROBUST DESIGN
- ANTIGLARE DIFFUSER
- HIGH GRADE ALUMINIUM BUILT

**CUTOUT**

	12W	18W	24W
● Dia	110 mm	145 mm	165 mm
■	110 (L) x 110 (W) mm	145 (L) x 145 (W) mm	165 (L) x 165 (W) mm

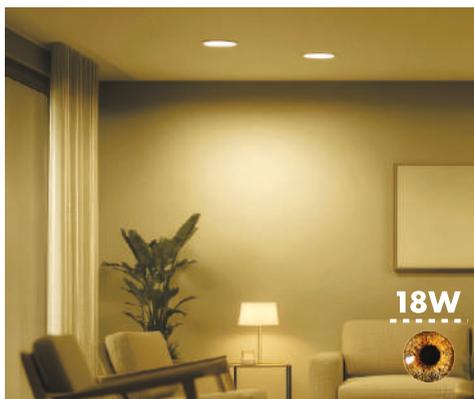

**POLLUX**  
2X2 LED PANEL LIGHTS



**36W | LP(₹)2830.00**

**Product Code:** PPI-PLX-36W-TTP  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 3600 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 600 (L) x 600 (W) x 33 (H) mm  
**Master Pkg.:** 4 Units


**45W | LP(₹)3330.00**

**Product Code:** PPI-PLX-45W-TTP  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 4500 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 600 (L) x 600 (W) x 33 (H) mm  
**Master Pkg.:** 4 Units

- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- AL SLEEK DESIGN
- ANTIGLARE DIFFUSER
- HIGH GRADE ALUMINIUM BUILT

**CUTOUT**

590 (L) x 590 (W) mm



36W / 45W



# APUSTAR

## MINI LED JUNCTION DOWNLIGHTS



IP20 | RoHS |




**3W | LP(₹) 168.00**

**Product Code:** PPI-APS-3W-MJD  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 240 Lumens  
**Efficacy:** 80 lm/W  
**Product Size:** 80 (Dia) x 35 (H) mm  
**Master Pkg.:** 100 Units

**3W | LP(₹) 250.00**


**(3 IN 1 COLOUR)**  
**Product Code:** PPI-APS-3W-MJD 3IN1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens:** 240 Lumens (Cool White)  
**Efficacy:** 80 lm/W (Cool White)  
**Product Size:** 80 (Dia) x 35 (H) mm  
**Master Pkg.:** 100 Units

3 IN 1 CCT CHANGING ON TOGGLE SWITCHING

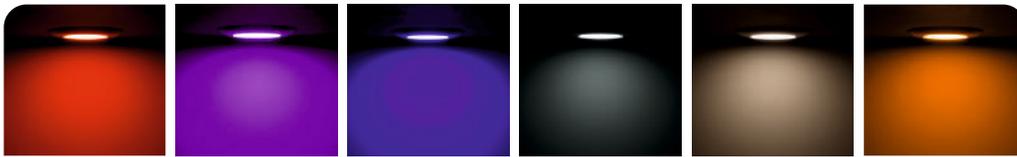

- ENERGY SAVINGS
- 80 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- 3 IN 1 LIGHTING APPLICATION
- TOGGLE SWITCH MECHANISM
- BRIGHT LIGHT OUTPUT

**CUTOUT**



**Note :** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.



**APUSTAR**  
COB LED JUNCTION DOWNLIGHTS




**3W | LP(₹)250.00**

**Product Code:** PPI-APS-3W-CJD  
**Power Factor:** >0.95  
**Opr. Voltage :** AC 100V~300V,50Hz  
**Lumens :** 300 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 80 (Dia) x 35 (H) mm  
**Master Pkg. :** 100 Units

**3W | LP(₹)312.00**

**(3 IN 1 COLOUR)**  
**Product Code:** PPI-APS-3W-CJD 3IN 1  
**Power Factor:** >0.95  
**Opr. Voltage :** AC 100V~300V,50Hz  
**Lumens :** 300 Lumens (Cool White)  
**Efficacy :** 100 lm/W (Cool White)  
**Product Size :** 80 (Dia) x 35 (H) mm  
**Master Pkg. :** 100 Units

OFF ON **3 IN 1 CCT CHANGING ON TOGGLE SWITCHING**

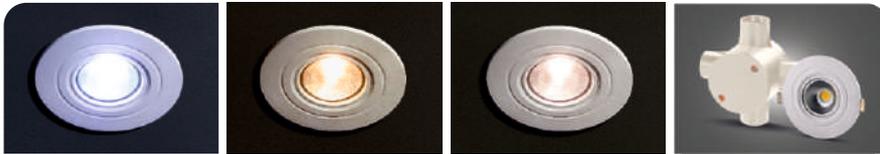

**CLICK ONCE**  
FOR COOL WHITE


**CLICK TWICE**  
FOR WARM WHITE

**CLICK THIRCE**  
FOR NEUTRAL WHITE

**4 WAY DEEP JUNCTION**  
BOX FITTING

- ENERGY SAVINGS**
- 100 LUMENS PER WATT**
- WIDE BEAM ANGLE**
- LONG LIFE**
- EXCELLENT CRI**
- SURGE PROTECTION**
- OVER VOLTAGE PROTECTION**
- 3 IN 1 LIGHTING APPLICATION**
- TOGGLE SWITCH MECHANISM**
- BRIGHT LIGHT OUTPUT**

**CUTOUT**



**Note :** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



# APUSTAR

## TWIN COLOUR LED JUNCTION DOWNLIGHTS


 IP20 | RoHS |   



  
**1 YEAR WARRANTY**

**8W+8W | LP(₹)460.00**

**Product Code:** PPI-APS-8+8W-TCJ  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 800 Lumens (Cool White)  
**Efficacy:** 100 lm/W (Cool White)  
**Product Size:** 88 (Dia) x 45 (H) mm  
**Cutout:** 50 (Dia) mm  
**Master Pkg.:** 100 Units

**12W+12W | LP(₹)840.00**

**Product Code:** PPI-APS-12+12W-TCJ  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1200 Lumens (Cool White)  
**Efficacy:** 100 lm/W (Cool White)  
**Product Size:** 130 (Dia) x 50 (H) mm  
**Cutout:** 50 - 125 (Dia) mm Adjustable  
**Master Pkg.:** 60 Units




-  **ENERGY SAVINGS**
-  **100 LUMENS PER WATT (6500K)**
-  **WIDE BEAM ANGLE**
-  **LONG LIFE**
-  **EXCELLENT CRI**
-  **SURGE PROTECTION**
-  **OVER VOLTAGE PROTECTION**
-  **3 IN 1 LIGHTING APPLICATION**
-  **TOGGLE SWITCH MECHANISM**
-  **DECORATIVE FINISH**




**4 WAY DEEP JUNCTION BOX FITTING**

**CUTOUT**



**8W + 8W**



**12W + 12W (ADJUSTABLE)**

 **3 IN 1 CCT CHANGING ON TOGGLE SWITCHING**

**Note:** \* Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.



# APUSTAR

## SLIM LED JUNCTION DOWNLIGHTS




**7W | LP(₹)260.00**

**Product Code:** PPI-APS-7W-SCJ  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V-300V,50Hz  
**Lumens:** 630 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 110 (Dia) x 30 (H) mm  
**Cutout:** 80 (Dia) mm  
**Master Pkg.:** 100 Units

**7W | LP(₹)320.00**

**(3 IN 1 COLOUR)**  
**Product Code:** PPI-APS-7W-SCJ 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 100V-300V,50Hz  
**Lumens:** 630 Lumens (Cool White)  
**Efficacy:** 90 lm/W (Cool White)  
**Product Size:** 110 (Dia) x 30 (H) mm  
**Cutout:** 80 (Dia) mm  
**Master Pkg.:** 100 Units

 **3 IN 1 CCT CHANGING ON TOGGLE SWITCHING**

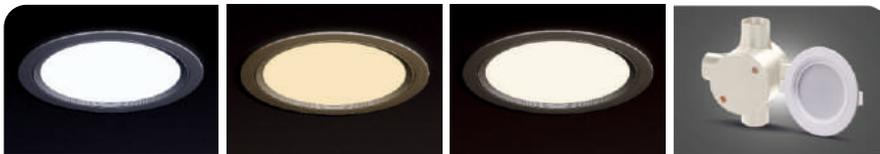


**CLICK ONCE FOR COOL WHITE**

**CLICK TWICE FOR WARM WHITE**


**CLICK THRICE FOR NEUTRAL WHITE**

**4 WAY DEEP JUNCTION BOX FITTING**

-  **ENERGY SAVINGS**
-  **90 LUMENS PER WATT**
-  **WIDE BEAM ANGLE**
-  **LONG LIFE**
-  **EXCELLENT CRI**
-  **SURGE PROTECTION**
-  **OVER VOLTAGE PROTECTION**
-  **3 IN 1 LIGHTING APPLICATION**
-  **TOGGLE SWITCH MECHANISM**
-  **BRIGHT LIGHT OUTPUT**

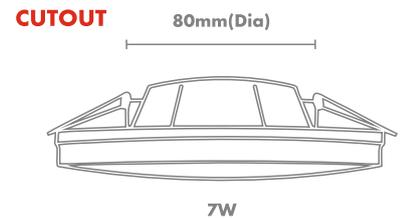

**Note:** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.

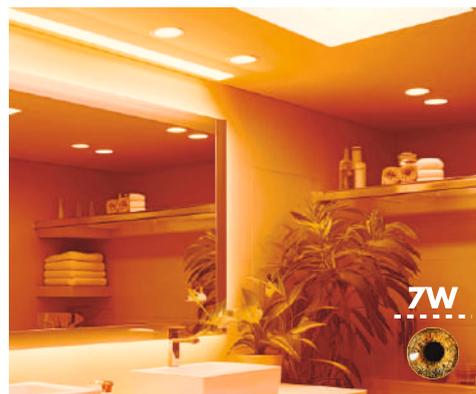

# APUSTAR

## RIMLESS LED JUNCTION DOWNLIGHTS

IP20 | RoHS |   



**2 YEARS**  
WARRANTY



**4 WAY DEEP  
JUNCTION BOX FITTING**

**8W | LP(₹)450.00**

**Product Code:** PPI-APS-8W-RJD  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 800 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 85 (Dia) x 58 (H) mm  
**Cutout:** 45 (Dia) mm  
**Master Pkg.:** 100 Units


**15W | LP(₹)796.00**

**Product Code:** PPI-APS-15W-RJD  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1500 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 140 (Dia) x 60 (H) mm  
**Cutout:** 45 (Dia) mm  
**Master Pkg.:** 60 Units



-  **ENERGY SAVINGS**
-  **100 LUMENS PER WATT**
-  **WIDE BEAM ANGLE**
-  **LONG LIFE**
-  **EXCELLENT CRI**
-  **SURGE PROTECTION**
-  **OVER VOLTAGE PROTECTION**
-  **COMPACT DESIGN**
-  **ANTI GLARE DIFFUSER**
-  **HIGH QUALITY POLYCARBONATE BUILT**

### CUTOUT

45mm (Dia)



**8W-15W**

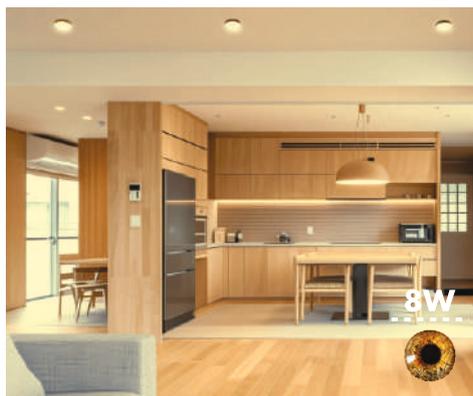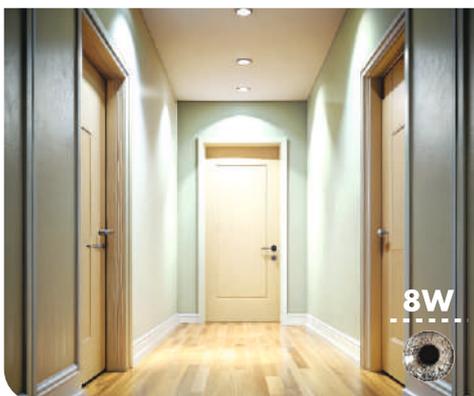

**BELLATRIX**  
COB LED SPOTLIGHTS



COOL WHITE



WARM WHITE



NEUTRAL WHITE



RED



GREEN



BLUE



PINK



BIS APPROVED

IP20

RoHS



**JUNIOR LED SPOTLIGHT**

**2W | LP(₹) 120.00**

Product Code: PPI-BTX-2W-JSL

Power Factor: >0.50

Oper. Voltage: AC 100V~300V, 50Hz

Lumens : 160 Lumens

Efficacy : 80 lm/W

Product Size : 42 (Dia) x 18 (H) mm

Cutout : 32 (Dia) mm

Master Pkg. : 500 Units

**FIXED COB LED SPOTLIGHT**

**3W | LP(₹) 252.00**

Product Code: PPI-BTX-3W-FSL

Power Factor: >0.95

Oper. Voltage: AC 100V~300V, 50Hz

Lumens : 300 Lumens

Efficacy : 100 lm/W

Product Size : 80 (Dia) x 35 (H) mm


Cutout : 40 (Dia) mm

Master Pkg. : 100 Units

**CUTOUT**



2W



3W



ENERGY SAVINGS



80 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



SLEEK DESIGN



BRIGHT LIGHT OUTPUT



HIGH QUALITY COB CHIP



2W



3W



3W

# BELLATRIX

## MOVABLE COB LED SPOTLIGHTS



### MOVABLE COB LED SPOTLIGHT

**3W | LP(₹)256.00**

**Product Code:** PPI-BTX-3W-MSL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 270 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 70 (Dia) x 36 (H) mm  
**Master Pkg.:** 100 Units

### TRICOLOUR MOVABLE COB LED SPOTLIGHT

**3W | LP(₹)350.00**

**Product Code:** PPI-BTX-3W-MSL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 270 Lumens (Cool White)  
**Efficacy:** 90 lm/W (Cool White)  
**Product Size:** 70 (Dia) x 36 (H) mm  
**Master Pkg.:** 100 Units

**7W | LP(₹)378.00**

**Product Code:** PPI-BTX-7W-MSL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 630 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 110 (Dia) x 50 (H) mm  
**Master Pkg.:** 100 Units

**7W | LP(₹)470.00**

**Product Code:** PPI-BTX-7W-MSL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 630 Lumens (Cool White)  
**Efficacy:** 90 lm/W (Cool White)  
**Product Size:** 110 (Dia) x 50 (H) mm  
**Master Pkg.:** 100 Units

**12W | LP(₹)740.00**


**Product Code:** PPI-BTX-12W-MSL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1080 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 150 (Dia) x 60 (H) mm  
**Master Pkg.:** 60 Units

**12W | LP(₹)840.00**

**Product Code:** PPI-BTX-12W-MSL 3 IN 1  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1080 Lumens (Cool White)  
**Efficacy:** 90 lm/W (Cool White)  
**Product Size:** 150 (Dia) x 60 (H) mm  
**Master Pkg.:** 60 Units



**Note:** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.

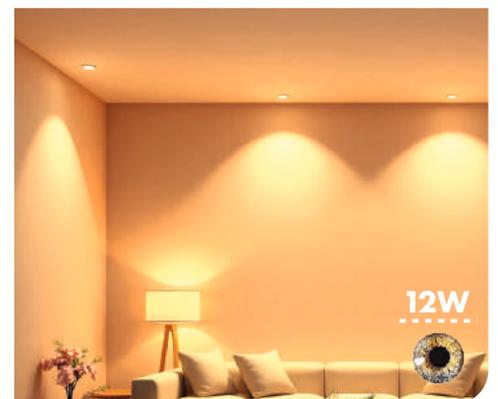

**ALNITAK**  
DEEP COB LED SPOTLIGHTS



**3 IN 1 CCT CHANGING ON TOGGLE SWITCHING**



**CLICK ONCE**  
FOR COOL WHITE

**CLICK TWICE**  
FOR WARM WHITE

**CLICK THRICE**  
FOR NEUTRAL WHITE

- 96% ENERGY SAVINGS
- 100 LUMENS PER WATT
- 75° WIDE BEAM ANGLE
- 30000+hrs LONG LIFE
- CRI > 80 EXCELLENT CRI
- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- HIGH GRADE ALUMINIUM BUILD
- HIGH QUALITY COB CHIP

**7W | LP(₹)660.00**


**Product Code:** PPI-ALT-7W-DCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 700 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 65 (Dia) x 60 (H) mm  
**Cutout:** 55 (Dia) mm  
**Master Pkg.:** 20 Units

**12W | LP(₹)860.00**

**Product Code:** PPI-ALT-12W-DCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1200 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 85 (Dia) x 76 (H) mm  
**Cutout:** 75 (Dia) mm  
**Master Pkg.:** 20 Units

**18W | LP(₹)1180.00**

**Product Code:** PPI-ALT-18W-DCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 95 (Dia) x 100 (H) mm  
**Cutout:** 85 (Dia) mm  
**Master Pkg.:** 20 Units



**CUTOUT**

7W	12W	18W
Dia 55 mm	Dia 75 mm	Dia 85 mm

**Note:** \* Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



# ALNITAK

## PIXEL COB LED SPOTLIGHTS



### 7W | LP(₹)850.00


**Product Code:** PPI-ALT-7W-PCD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 700 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 65 (Dia) x 63 (H) mm  
**Cutout:** 55 (Dia) mm  
**Master Pkg.:** 20 Units

### 12W | LP(₹)1120.00

**Product Code:** PPI-ALT-12W-PCD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1200 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 85 (Dia) x 70 (H) mm  
**Cutout:** 72 (Dia) mm  
**Master Pkg.:** 20 Units

### 18W | LP(₹)1380.00

**Product Code:** PPI-ALT-18W-PCD  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 105 (Dia) x 83 (H) mm  
**Cutout:** 95 (Dia) mm  
**Master Pkg.:** 20 Units

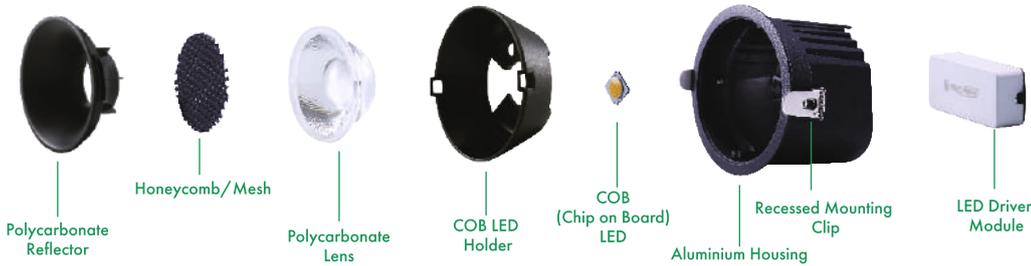


- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- HIGH GRADE ALUMINIUM BUILT
- HIGH QUALITY COB CHIP



**CUTOUT**

7W	12W	18W
Dia 55 mm	Dia 72 mm	Dia 95 mm

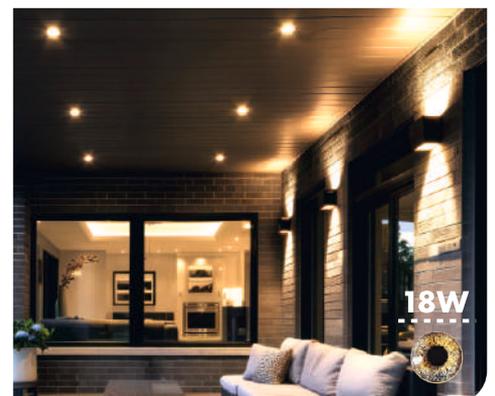

**ALNITAK**  
SURFACE CYLINDER COB LED SPOTLIGHTS



**7W | LP(₹) 940.00**

**Product Code:** PPI-ALT-7W-CCS  
**Power Factor:** >0.50  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 700 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 55 (Dia) x 73 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units

**12W | LP(₹) 1260.00**

**Product Code:** PPI-ALT-12W-CCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1200 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 75 (Dia) x 83 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units

**18W | LP(₹) 1570.00**

**Product Code:** PPI-ALT-18W-CCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 97 (Dia) x 95 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units



- 96% ENERGY SAVINGS
- 100 LUMENS PER WATT
- 75° WIDE BEAM ANGLE
- 30000+H LONG LIFE
- EXCELLENT CRI > 80
- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- HIGH GRADE ALUMINIUM BUILT
- HIGH QUALITY COB CHIP



# ALNITAK

## SURFACE COB LED SPOTLIGHTS



COOL WHITE  
(6500K)



WARM WHITE  
(3000K)



NEUTRAL WHITE  
(4000K)



BIS APPROVED

IP20

RoHS



### 10W | LP(₹) 1050.00

**Product Code:** PPI-ALT-10W-SCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 900 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 50 (Dia) x 60 (W) x 165 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units

### 20W | LP(₹) 1580.00

**Product Code:** PPI-ALT-20W-SCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 65 (Dia) x 70 (W) x 195 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units

### 30W | LP(₹) 2060.00

**Product Code:** PPI-ALT-30W-SCS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 2700 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 75 (Dia) x 70 (W) x 215 (H) mm  
**Cutout:** Surface Mounting  
**Master Pkg.:** 20 Units



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION



HIGH GRADE ALUMINIUM BUILT




HIGH QUALITY COB CHIP



# ALNITAK

## MOVABLE COB LED TRACK SPOTLIGHTS

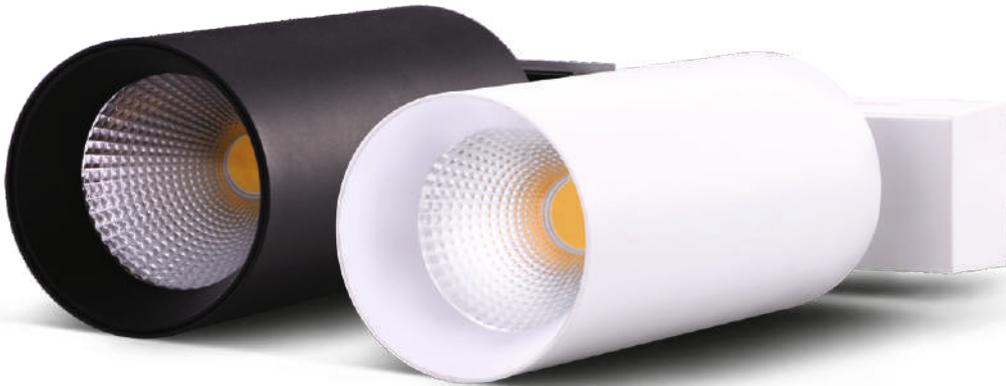

### 10W | LP(₹) 1140.00

**Product Code:** PPI-ALT-10W-MTS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 900 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 50 (Dia) x 85 (W) x 175 (H) mm  
**Cutout:** Track Mounting  
**Master Pkg.:** 20 Units


### 20W | LP(₹) 1720.00

**Product Code:** PPI-ALT-20W-MTS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 1800 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 65 (Dia) x 85 (W) x 205 (H) mm  
**Cutout:** Track Mounting  
**Master Pkg.:** 20 Units

### 30W | LP(₹) 2200.00

**Product Code:** PPI-ALT-30W-MTS  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 2700 Lumens  
**Efficacy:** 90 lm/W  
**Product Size:** 75 (Dia) x 85 (W) x 225 (H) mm  
**Cutout:** Track Mounting  
**Master Pkg.:** 20 Units

- 96% ENERGY SAVINGS
- 90 LUMENS PER WATT
- 60° WIDE BEAM ANGLE
- 50000hrs LONG LIFE
- CRI > 80 EXCELLENT CRI
- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- AL HIGH GRADE ALUMINIUM BUILT
- HIGH QUALITY COB CHIP

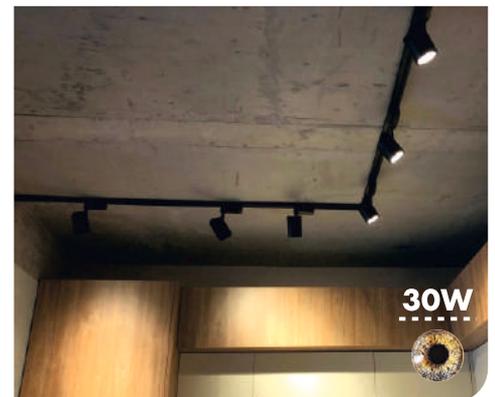

# VELORUM

## LED STRIP LIGHTS



### 25W | LP(₹)550.00

(60 LED/METER)

**Product Code:** PPI-VRM-25W-1260-DSL  
**LED Size :** 2835/3535  
**Opr. Voltage :** DC 12V  
**Lumens :** 450 Lumens / Meter  
**Cutting Unit :** After 1 Meter  
**Roll Size :** 100 (Dia) x 15 (H) mm  
**Strip Length :** 5 Meter  
**Master Pkg. :** 40 Units

### 40W | LP(₹)880.00

(120 LED/METER)

**Product Code:** PPI-VRM-40W-1212-DSL  
**LED Size :** 2835/3535  
**Opr. Voltage :** DC 12V  
**Lumens :** 720 Lumens / Meter  
**Cutting Unit :** After 1 Meter  
**Roll Size :** 100 (Dia) x 15 (H) mm  
**Strip Length :** 5 Meter  
**Master Pkg. :** 40 Units

### 60W | LP(₹)1200.00

(180 LED/METER)

**Product Code:** PPI-VRM-60W-1218-DSL  
**LED Size :** 2835/3535  
**Opr. Voltage :** DC 12V  
**Lumens :** 1080 Lumens / Meter  
**Cutting Unit :** After 1 Meter  
**Roll Size :** 130 (Dia) x 20 (H) mm  
**Strip Length :** 5 Meter  
**Master Pkg. :** 40 Units


### 75W | LP(₹)1390.00

(240 LED/METER)

**Product Code:** PPI-VRM-75W-1224-DSL  
**LED Size :** 2835/3535  
**Opr. Voltage :** DC 12V  
**Lumens :** 1350 Lumens / Meter  
**Cutting Unit :** After 1 Meter  
**Roll Size :** 130 (Dia) x 20 (H) mm  
**Strip Length :** 5 Meter  
**Master Pkg. :** 40 Units

- ENERGY SAVINGS
- INGRESS PROTECTION
- 5 METER ROLL
- DECORATIVE LIGHTING
- EXCELLENT CRI
- LONG LIFE
- ECO FRIENDLY
- EASY INSTALLATION USING ADHESIVE TAPE
- LM80 CERTIFIED LED CHIP
- MAINTENANCE FREE
- INDOOR USE ONLY

**Note :** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.

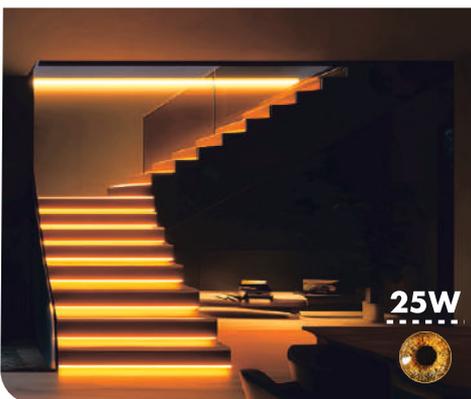

# VELORUM

## LED ROPE LIGHTS



### 6W/M | LP(₹)7300.00

(60 LED/METER)

Product Code: PPI-VRM-6WPM-60-DRL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V,50Hz

Lumens : 540 Lumens / Meter

LED Size : 2835/2850

Roll Size : 255 (Dia) x 120 (H) mm

Rope Length : 45 Meter

Master Pkg. : 8 Units

### 8W/M | LP(₹)7830.00

(120 LED/METER)

Product Code: PPI-VRM-8WPM-120-DRL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V,50Hz

Lumens : 720 Lumens / Meter

LED Size : 2835/2850

Roll Size : 255 (Dia) x 120 (H) mm

Rope Length : 45 Meter

Master Pkg. : 8 Units

### 6W/M | LP(₹)2800.00

(60 LED/METER)

Product Code: PPI-VRM-6WPM-60-TRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V,50Hz

Lumens : 360 Lumens / Meter

Colour : Orange - White - Green

Roll Size : 150 (Dia) x 70 (H) mm

Rope Length : 18 Meter

Master Pkg. : 12 Units

### 8W/M | LP(₹)3100.00

(120 LED/METER)

Product Code: PPI-VRM-8WPM-120-TRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V,50Hz

Lumens : 480 Lumens / Meter

Colour : Orange - White - Green

Roll Size : 150 (Dia) x 70 (H) mm

Rope Length : 18 Meter

Master Pkg. : 12 Units

### AC RECTIFIER KIT

LP(₹)190.00

Product Code: PPI-VRM-ACDC-RRL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V,50Hz


Product Size : 50 (L) x 20 (W) x 30 (H) mm

IP Protection : IP66

Master Pkg. : 50 Units



**Note :** \*Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.

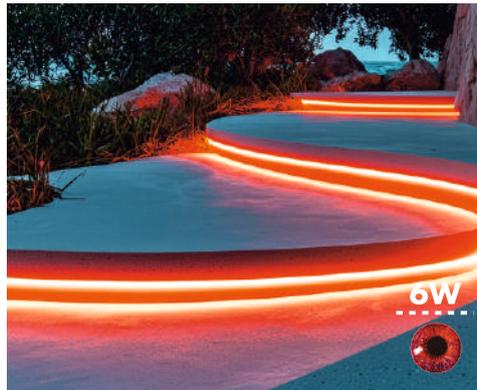

# CENTAURUS

## OVAL & NEO LENS LED STREET LIGHTS



### 24W | LP(₹)1150.00

**Product Code** : PPI-CRS-24W-OSL  
**Power Factor** : >0.95  
**Opr. Voltage** : AC 90V~300V,50Hz  
**Lumens** : 2640 Lumens  
**Efficacy** : 110 lm/W  
**Product Size** : 262 (L) x 120 (W) x 55 (H) mm  
**Pole Diameter** : 45 (Dia) mm  
**Master Pkg.** : 30 Units

### 36W | LP(₹)1640.00

**Product Code** : PPI-CRS-36W-OSL  
**Power Factor** : >0.95  
**Opr. Voltage** : AC 90V~300V,50Hz  
**Lumens** : 3960 Lumens  
**Efficacy** : 110 lm/W  
**Product Size** : 295 (L) x 145 (W) x 55 (H) mm  
**Pole Diameter** : 45 (Dia) mm  
**Master Pkg.** : 20 Units

### 24W-N | LP(₹)900.00

**Product Code** : PPI-CRS-24W-OSL N  
**Power Factor** : >0.90  
**Opr. Voltage** : AC 140V ~ 300V,50Hz  
**Lumens** : 2160 Lumens  
**Efficacy** : 90 lm/W  
**Product Size** : 245 (L) x 90 (W) x 58 (H) mm  
**Pole Diameter** : 50 (Dia) mm  
**Master Pkg.** : 20 Units

### 36W-N | LP(₹)1050.00

**Product Code** : PPI-CRS-36W-OSL N  
**Power Factor** : >0.90  
**Opr. Voltage** : AC 140V ~ 300V,50Hz  
**Lumens** : 3240 Lumens  
**Efficacy** : 90 lm/W  
**Product Size** : 295 (L) x 95 (W) x 55 (H) mm  
**Pole Diameter** : 50 (Dia) mm  
**Master Pkg.** : 20 Units

### 50W | LP(₹)2100.00

**Product Code** : PPI-CRS-50W-OSL  
**Power Factor** : >0.95  
**Opr. Voltage** : AC 90V~300V,50Hz  
**Lumens** : 5500 Lumens  
**Efficacy** : 110 lm/W  
**Product Size** : 345 (L) x 175 (W) x 55 (H) mm  
**Pole Diameter** : 50 (Dia) mm  
**Master Pkg.** : 20 Units

### 100W | LP(₹)3520.00




**Product Code** : PPI-CRS-100W-OSL  
**Power Factor** : >0.95  
**Opr. Voltage** : AC 90V~300V,50Hz  
**Lumens** : 11000 Lumens  
**Efficacy** : 110 lm/W  
**Product Size** : 385 (L) x 200 (W) x 60 (H) mm  
**Pole Diameter** : 55 (Dia) mm  
**Master Pkg.** : 10 Units

### 50W-N | LP(₹)1430.00

**Product Code** : PPI-CRS-50W-OSL N  
**Power Factor** : >0.90  
**Opr. Voltage** : AC 140V ~ 300V,50Hz  
**Lumens** : 4500 Lumens  
**Efficacy** : 90 lm/W  
**Product Size** : 380 (L) x 105 (W) x 80 (H) mm  
**Pole Diameter** : 70 (Dia) mm  
**Master Pkg.** : 20 Units


### 100W-N | LP(₹)2220.00

**Product Code** : PPI-CRS-100W-OSL N  
**Power Factor** : >0.90  
**Opr. Voltage** : AC 140V ~ 300V,50Hz  
**Lumens** : 9000 Lumens  
**Efficacy** : 90 lm/W  
**Product Size** : 435 (L) x 125 (W) x 80 (H) mm  
**Pole Diameter** : 70 (Dia) mm  
**Master Pkg.** : 10 Units

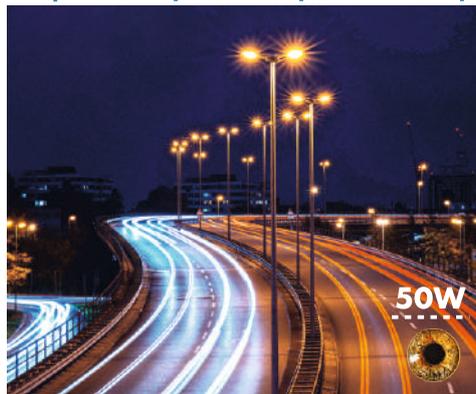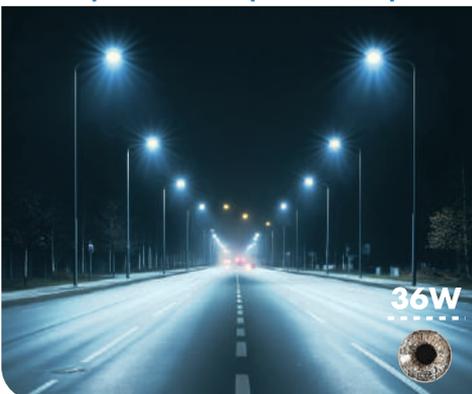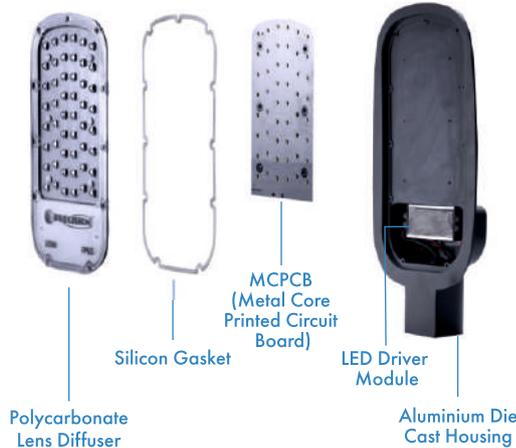

# CENTAURUS

## LENS LED STREET LIGHTS



### 20W | LP(₹) 1240.00

<b>Product Code</b>	: PPI-CRS-20W-LSL
<b>Power Factor</b>	: >0.95
<b>Opr. Voltage</b>	: AC 90V~300V,50Hz
<b>Lumens</b>	: 2000 Lumens
<b>Efficacy</b>	: 100 lm/W
<b>Product Size</b>	: 280 (L) x 105 (W) x 55 (H) mm
<b>Product Diameter</b>	: 45 (Dia) mm
<b>Master Pkg.</b>	: 30 Units

### 30W | LP(₹) 1680.00

<b>Product Code</b>	: PPI-CRS-30W-LSL
<b>Power Factor</b>	: >0.95
<b>Opr. Voltage</b>	: AC 90V~300V,50Hz
<b>Lumens</b>	: 3000 Lumens
<b>Efficacy</b>	: 100 lm/W
<b>Product Size</b>	: 320 (L) x 125 (W) x 55 (H) mm
<b>Product Diameter</b>	: 45 (Dia) mm
<b>Master Pkg.</b>	: 20 Units

### 50W | LP(₹) 2230.00

<b>Product Code</b>	: PPI-CRS-50W-LSL
<b>Power Factor</b>	: >0.95
<b>Opr. Voltage</b>	: AC 90V~300V,50Hz
<b>Lumens</b>	: 5000 Lumens
<b>Efficacy</b>	: 100 lm/W
<b>Product Size</b>	: 375 (L) x 165 (W) x 60 (H) mm
<b>Product Diameter</b>	: 45 (Dia) mm
<b>Master Pkg.</b>	: 20 Units

### 100W | LP(₹) 3570.00

<b>Product Code</b>	: PPI-CRS-100W-LSL
<b>Power Factor</b>	: >0.95
<b>Opr. Voltage</b>	: AC 90V~300V,50Hz
<b>Lumens</b>	: 10000 Lumens
<b>Efficacy</b>	: 100 lm/W
<b>Product Size</b>	: 475 (L) x 205 (W) x 65 (H) mm
<b>Product Diameter</b>	: 50 (Dia) mm
<b>Master Pkg.</b>	: 10 Units

- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- INGRESS PROTECTION
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- ALUMINIUM DIE CAST BODY
- HIGH GRADE POLYCARBONATE DIFFUSER



# MINTAKA

## LENS LED FLOOD LIGHTS



### 30W | LP(₹) 1140.00

**Product Code:** PPI-MTK-30W-LFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V-300V, 50Hz  
**Lumens:** 3000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 210 (L) x 150 (W) x 25 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 30 Units

### 50W | LP(₹) 1300.00

**Product Code:** PPI-MTK-50W-LFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V-300V, 50Hz  
**Lumens:** 5000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 210 (L) x 150 (W) x 25 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 30 Units

### 100W | LP(₹) 2300.00

**Product Code:** PPI-MTK-100W-LFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V-300V, 50Hz  
**Lumens:** 10000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 260 (L) x 200 (W) x 25 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 20 Units

### 200W | LP(₹) 4280.00

**Product Code:** PPI-MTK-200W-LFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V-300V, 50Hz  
**Lumens:** 20000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 350 (L) x 250 (W) x 25 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 20 Units



# MINTAKA

## TUBULAR LENS LED FLOOD LIGHTS



### 30W | LP(₹) 1690.00

**Product Code:** PPI-MTK-30W-TFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 3150 Lumens  
**Efficacy:** 105 lm/W  
**Product Size:** 190 (L) x 160 (W) x 30 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 30 Units

### 50W | LP(₹) 2160.00

**Product Code:** PPI-MTK-50W-TFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 5250 Lumens  
**Efficacy:** 105 lm/W  
**Product Size:** 210 (L) x 195 (W) x 30 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 20 Units

### 100W | LP(₹) 3360.00


**Product Code:** PPI-MTK-100W-TFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 10500 Lumens  
**Efficacy:** 105 lm/W  
**Product Size:** 270 (L) x 240 (W) x 30 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 20 Units

### 150W | LP(₹) 4890.00

**Product Code:** PPI-MTK-150W-TFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 15750 Lumens  
**Efficacy:** 105 lm/W  
**Product Size:** 320 (L) x 280 (W) x 35 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 10 Units

### 200W | LP(₹) 5360.00

**Product Code:** PPI-MTK-200W-TFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V, 50Hz  
**Lumens:** 21000 Lumens  
**Efficacy:** 105 lm/W  
**Product Size:** 320 (L) x 280 (W) x 35 (H) mm  
**Mount Type:** Bracket Mounting  
**Master Pkg.:** 10 Units

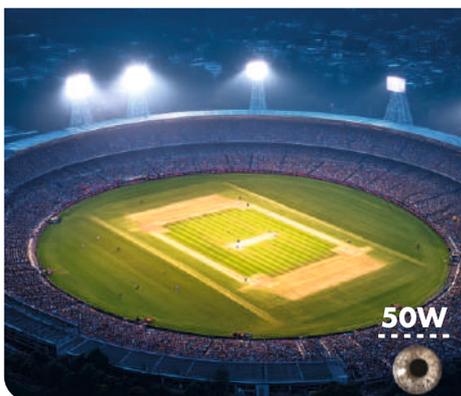

# MINTAKA

## TG LED FLOOD LIGHTS



COOL WHITE  
(6500K)



WARM WHITE  
(3000K)



BIS APPROVED

IP66

RoHS



2 YEARS  
WARRANTY



### 30W | LP(₹)1880.00

**Product Code:** PPI-MTK-30W-GFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 3300 Lumens  
**Efficacy :** 110 lm/W  
**Product Size :** 185 (L) x 180 (W) x 45 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 20 Units

### 50W | LP(₹)2330.00

**Product Code:** PPI-MTK-50W-GFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 5500 Lumens  
**Efficacy :** 110 lm/W  
**Product Size :** 230 (L) x 225 (W) x 50 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 20 Units

### 100W | LP(₹)3880.00

**Product Code:** PPI-MTK-100W-GFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 11000 Lumens  
**Efficacy :** 110 lm/W  
**Product Size :** 290 (L) x 290 (W) x 60 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 10 Units

### 150W | LP(₹)5830.00

**Product Code:** PPI-MTK-150W-GFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 16500 Lumens  
**Efficacy :** 110 lm/W  
**Product Size :** 285 (L) x 275 (W) x 60 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 10 Units

### 200W | LP(₹)6860.00


**Product Code:** PPI-MTK-200W-GFL  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens :** 22000 Lumens  
**Efficacy :** 110 lm/W  
**Product Size :** 335 (L) x 315 (W) x 60 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 10 Units

### 50W-N | LP(₹)1630.00

**Product Code:** PPI-MTK-50W-N-GFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 5000 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 185 (L) x 180 (W) x 45 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 20 Units

### 100W-N | LP(₹)2820.00

**Product Code:** PPI-MTK-100W-N-GFL  
**Power Factor:** >0.90  
**Opr. Voltage:** AC 100V~300V,50Hz  
**Lumens :** 10000 Lumens  
**Efficacy :** 100 lm/W  
**Product Size :** 230 (L) x 225 (W) x 50 (H) mm  
**Mount Type :** Bracket Mounting  
**Master Pkg. :** 20 Units

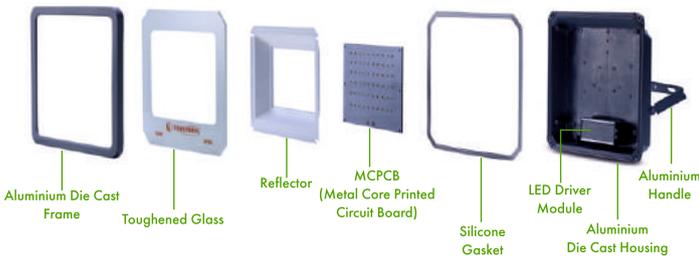

- ENERGY SAVINGS
- 110 LUMENS PER WATT
- WIDE BEAM ANGLE
- INGRESS PROTECTION
- EXCELLENT CRI
- SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- ALUMINIUM DIE CAST BODY
- HIGH THICKNESS TOUGHENED GLASS



# PROCYON

## LENS LED Highbay Lights



COOL WHITE  
(6500K)



WARM WHITE  
(3000K)



BIS APPROVED

IP66

RoHS



2 YEARS  
WARRANTY



### 50W | LP(₹)4000.00

**Product Code:** PPI-PCN-50W-LHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** : 5000 Lumens  
**Efficacy:** : 100 lm/W  
**Product Size:** : 245 (Dia) x 120 (H) mm  
**Mount Type:** : Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** : 6 Units

### 100W | LP(₹)5430.00

**Product Code:** PPI-PCN-100W-LHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** : 10000 Lumens  
**Efficacy:** : 100 lm/W  
**Product Size:** : 245 (Dia) x 120 (H) mm  
**Mount Type:** : Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** : 6 Units

### 150W | LP(₹)7500.00

**Product Code:** PPI-PCN-150W-LHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** : 15000 Lumens  
**Efficacy:** : 100 lm/W  
**Product Size:** : 340 (Dia) x 130 (H) mm  
**Mount Type:** : Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** : 4 Units

### 200W | LP(₹)9430.00

**Product Code:** PPI-PCN-200W-LHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** : 20000 Lumens  
**Efficacy:** : 100 lm/W  
**Product Size:** : 360 (Dia) x 175 (H) mm  
**Mount Type:** : Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** : 4 Units



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION



ALUMINIUM DIE CAST BODY



HIGH GRADE POLYCARBONATE DIFFUSER



# PROCYON

## SPIRAL LENS LED Highbay Lights



### 50W | LP(₹)4200.00

**Product Code:** PPI-PCN-50W-SHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 5000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 255 (Dia) x 165 (H) mm  
**Mount Type:** Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** 6 Units

### 100W | LP(₹)5800.00

**Product Code:** PPI-PCN-100W-SHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 10000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 255 (Dia) x 165 (H) mm  
**Mount Type:** Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** 6 Units

### 150W | LP(₹)8000.00

**Product Code:** PPI-PCN-150W-SHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 15000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 340 (Dia) x 130 (H) mm  
**Mount Type:** Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** 4 Units

### 200W | LP(₹)10000.00

**Product Code:** PPI-PCN-200W-SHB  
**Power Factor:** >0.95  
**Opr. Voltage:** AC 90V~300V,50Hz  
**Lumens:** 20000 Lumens  
**Efficacy:** 100 lm/W  
**Product Size:** 360 (Dia) x 175 (H) mm  
**Mount Type:** Bracket Mounting/Hanging Hook Screw  
**Master Pkg.:** 4 Units



## LIGHTING RELATED TERMS

CRI	Colour Rendering Index	CRI is an assessment of how the light source shows object colour "naturally" when compared to a familiar basis of daylight
CCT	Correlated Colour Temperature	CCT defines how the light appears and how it might make us feel
AC	Alternating Current	Electricity is delivered from local power grid to your home
DC	Direct Current	DC voltage is a constant voltage that drives the current in one direction
DOB	Driver on Board	DOB configuration is based on the consideration that LED drivers have been dominantly designed on metal core printed circuit board (MCPCB)
lm / W	Lumen per Watt	A measurement of luminous efficacy, which is the light output in lumens using one watt of electricity
BEE	Bureau of Energy Efficiency	BEE indicates the energy efficiency of a product and supports consumers to make informed choices when purchasing products
BIS	Bureau of Indian Standards	BIS is a quality standard certificate required for manufacturing and selling products in India, ensuring safety, quality, and reliability
RoHS	Restriction of Hazardous Substances	European Standards Restriction of Hazardous Substances
IP20	Ingress Protection 20	IP20 means an electrical enclosure is protected against solid objects
IP65	Ingress Protection 65	IP65 rating means a product is completely protected from dust and protection against low pressure water jets (e.g. 6.3 mm nozzle - water spread 12.5 litre in 1 minute)
IP66	Ingress Protection 66	IP66 rating means a product is completely protected from dust and protection against high pressure water jets (e.g. 12.5 mm nozzle - water spread 100 litre in 1 minute)
Dia.	Diameter	A diameter of a circle is any straight line segment that passes through the centre of the circle and whose endpoints lie on the circle
L x W x H	Length x Width x Height	Product area/size measurement term
	Double Insulated Appliance	This protection of appliances marked with this symbol is ensured by double insulation and does not require a safety connection to electrical earth (ground)
	Do not Dispose Trash	This Symbol indicates prevent pollution and protect the environment, it's crucial to not dispose of trash improperly
	Recycling Process	Recycling is the process of collecting and reprocessing materials, like paper, glass, and plastic to create new products and reduce waste



## **TERMS & CONDITIONS:**

- 1) Prices are subject to revise without prior notice.**
- 2) MRP indicates Maximum Retail Price. Taxes and local levies as applicable are inclusive.**
- 3) GST applicable extra on discounted price of MRP.**
- 4) Orders should be placed as per master pack quantity only.**
- 5) Actual products may vary from the product shown in the catalogue/pricelist.**
- 6) All specifications are based on standard test conditions in laboratory at ambient temperature with standard equipment's.**
- 7) Image/colours used in the catalogue/pricelist are strictly for representation purpose only.**
- 8) Continuous design improvement is a routine process at Precision, Data provided may change without any prior information. Customers are advised to reconfirm the data or product dimensions before purchase.**
- 9) Precision reserves the right to modify or change the product design and specification in the future without prior intimation.**



Lights | Desh ki Lifeline

**BE THE SOURCE**

**PRECISION PLASTIC INDUSTRIES PVT. LTD.**

19-D, Nand Jyot Industrial Estate, Safed Pool,  
Andheri-Kurla Road, Andheri East,  
Mumbai-400072. Maharashtra, India.



CATALOGUE

**WE CARE: +91 7715000015 | [www.precisionpipes.com](http://www.precisionpipes.com)**