



BE THE SOURCE

BE THE SOURCE

Since 1978 Precision Pipes has been one of India's leading manufacturers in Electrical & Plumbing Piping Systems and continue to be the source of carrying electricity and water safely into homes and work spaces across the world. Today we take our first step towards Lighting.


Precision is now the source for Lighting Systems.

Light is the source of life. With Precision LED Lighting Systems, we wish to inspire and empower our patrons to look at lighting in a creative way.

We want your spaces to come alive.

Light up your imagination and get ready to explore endless possibilities.
It's time to paint with light!

Kunal S. Kadakia



IT'S NOT WHAT YOU SEE,
IT'S HOW YOU SEE IT.

C O N T E N T S

SIRIUS
HIGH BEAM LED BULBS
1 - 4

ATRIA
HIGH POWER LED BULBS
5 - 8

NEUTRONSTAR
INVERTER LED BULBS
9 - 12

REGULUS
LED BATTENS
13 - 16

SAIPH
LED PANEL LIGHTS
17 - 22

TRIANGULUM
LED PANEL LIGHTS
23 - 26

PEGASUS
LED PANEL LIGHTS
27 - 30

TAYGETA
TWIN COLOUR LED PANEL LIGHTS
31 - 34

CARINA
SURFACE LED PANEL LIGHTS
35 - 38

ALNILAM
AL LED PANEL LIGHTS
39 - 44

POLLUX
2X2 LED PANEL LIGHTS
45 - 48

APUSTAR
LED JUNCTION DOWNLIGHTS
49 - 60

BELLATRIX
LED SPOTLIGHTS
61 - 66

ALNITAK
COB LED SPOTLIGHTS
67 - 78

VELORUM
DECORATIVE LED LIGHTS
79 - 84

CENTAURUS
LED STREET LIGHTS
85 - 90

MINTAKA
LED FLOOD LIGHTS
91 - 98

PROCYON
LED HIGHBAY LIGHTS
99 - 104

BE THE SOURCE



BE BRIGHT
SIRIUS HIGH BEAM LED BULBS



SIRIUS HIGH BEAM LED BULBS



IP20

RoHS



7W

Product Code: PPI-SRS-7W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22/ E27
Master Pkg.: 100 Units

12W

Product Code: PPI-SRS-12W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 65 (Dia) x 125 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units

9W

Product Code: PPI-SRS-9W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 900 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22/ E27
Master Pkg.: 100 Units

15W


Product Code: PPI-SRS-15W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Product Size: 70 (Dia) x 135 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units

10W

Product Code: PPI-SRS-10W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1000 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22/ E27
Master Pkg.: 100 Units

18W

Product Code: PPI-SRS-18W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 80 (Dia) x 152 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units

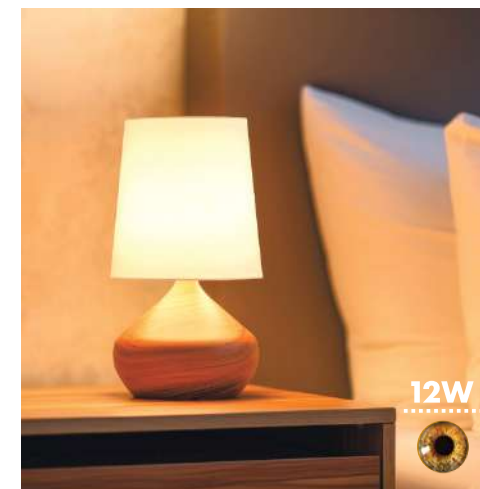

BE THE SOURCE

BE DRIVEN
ATRIA HIGH POWER LED BULBS





ATRIA HIGH POWER LED BULBS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI

IP20

RoHS



BIS APPROVED

20W

Product Code: PPI-ATA-20W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 2000 Lumens

Efficacy: 100 lm/W

Product Size: 80 (Dia) x 135 (H) mm

Base Holder: B22/ E27

Master Pkg.: 50 Units

30W

Product Code: PPI-ATA-30W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 3000 Lumens

Efficacy: 100 lm/W

Product Size: 100 (Dia) x 175 (H) mm

Base Holder: B22/ E27

Master Pkg.: 20 Units

40W

Product Code: PPI-ATA-40W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 4000 Lumens

Efficacy: 100 lm/W

Product Size: 120 (Dia) x 200 (H) mm

Base Holder: B22/ E27

Master Pkg.: 20 Units

50W

Product Code: PPI-ATA-50W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 5000 Lumens

Efficacy: 100 lm/W

Product Size: 140 (Dia) x 225 (H) mm

Base Holder: B22/ E27

Master Pkg.: 20 Units



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



DOB
TECHNOLOGY




OVERHEATING
PROTECTION



BRIGHT LIGHT
OUTPUT



1 YEAR
WARRANTY

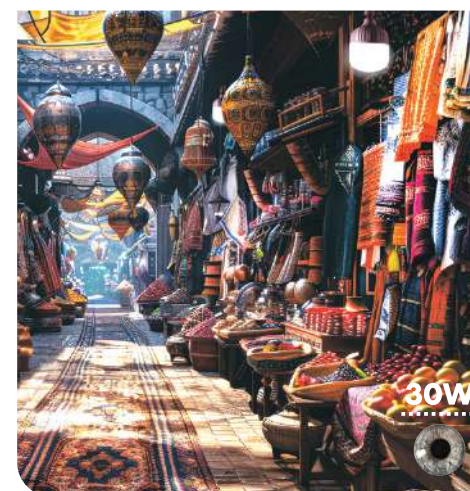

BE PREPARED
NEUTRONSTAR INVERTER LED BULBS





NEUTRONSTAR INVERTER LED BULBS



COOL WHITE
(6500K)



ENERGY
SAVINGS



105 LUMENS PER
WATT- AC MODE



WIDE BEAM
ANGLE



QUICK
CHARGING



EXCELLENT
CRI



IP20 | RoHS | Recycle | No Lead | No Mercury

9W

Product Code: PPI-NTS-9W-INB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 945 Lumens (AC Mode)
Efficacy: 105 lm/W (AC Mode)
Charge Time: 4-5 Hrs (Max)
Product Size: 70 (Dia) x 140 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units
Bulb Backup: 3 Mode Dimming

MODE 1

BACKUP UPTO
4HRS

350
LUMENS

MODE 2

BACKUP UPTO
6HRS

200
LUMENS

MODE 3

BACKUP UPTO
8HRS

100
LUMENS

12W

Product Code: PPI-NTS-12W-INB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1260 Lumens (AC Mode)
Efficacy: 105 lm/W (AC Mode)
Charge Time: 5-6 Hrs (Max)
Product Size: 70 (Dia) x 145 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units
Bulb Backup: 3 Mode Dimming

MODE 1

BACKUP UPTO
5HRS

400
LUMENS

MODE 2

BACKUP UPTO
7HRS

250
LUMENS

MODE 3

BACKUP UPTO
9HRS

150
LUMENS

10W

Product Code: PPI-NTS-10W-INB
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1000 Lumens (AC Mode)
DC Lumens: 350 Lumens (DC Mode)
Efficacy: 100 lm/W (AC Mode)
Charge Time: 8-10 Hrs (Max)
Product Size: 70 (Dia) x 140 (H) mm
Base Holder: B22/ E27
Master Pkg.: 50 Units
Bulb Backup: Up to 4 Hrs



350
LUMENS



3 STEP DIMMING WHILE TOGGLE SWITCH



CLICK ONCE
FOR HIGH LUMENS



CLICK TWICE
FOR MEDIUM LUMENS



CLICK THRICE
FOR LOW LUMENS



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



AUTOMATIC CHARGE MODE
ON WHEN POWER CUT



OVER CHARGE & DEEP BATTERY
DISCHARGE PROTECTION



AUTOMATIC BATTERY CHARGE
WHEN POWER ON



1 YEAR
WARRANTY



CLICK ONCE
FOR HIGH LUMENS




CLICK TWICE
FOR MEDIUM LUMENS



CLICK THRICE
FOR LOW LUMENS

BE FOCUSED
REGULUS LED BATTENS

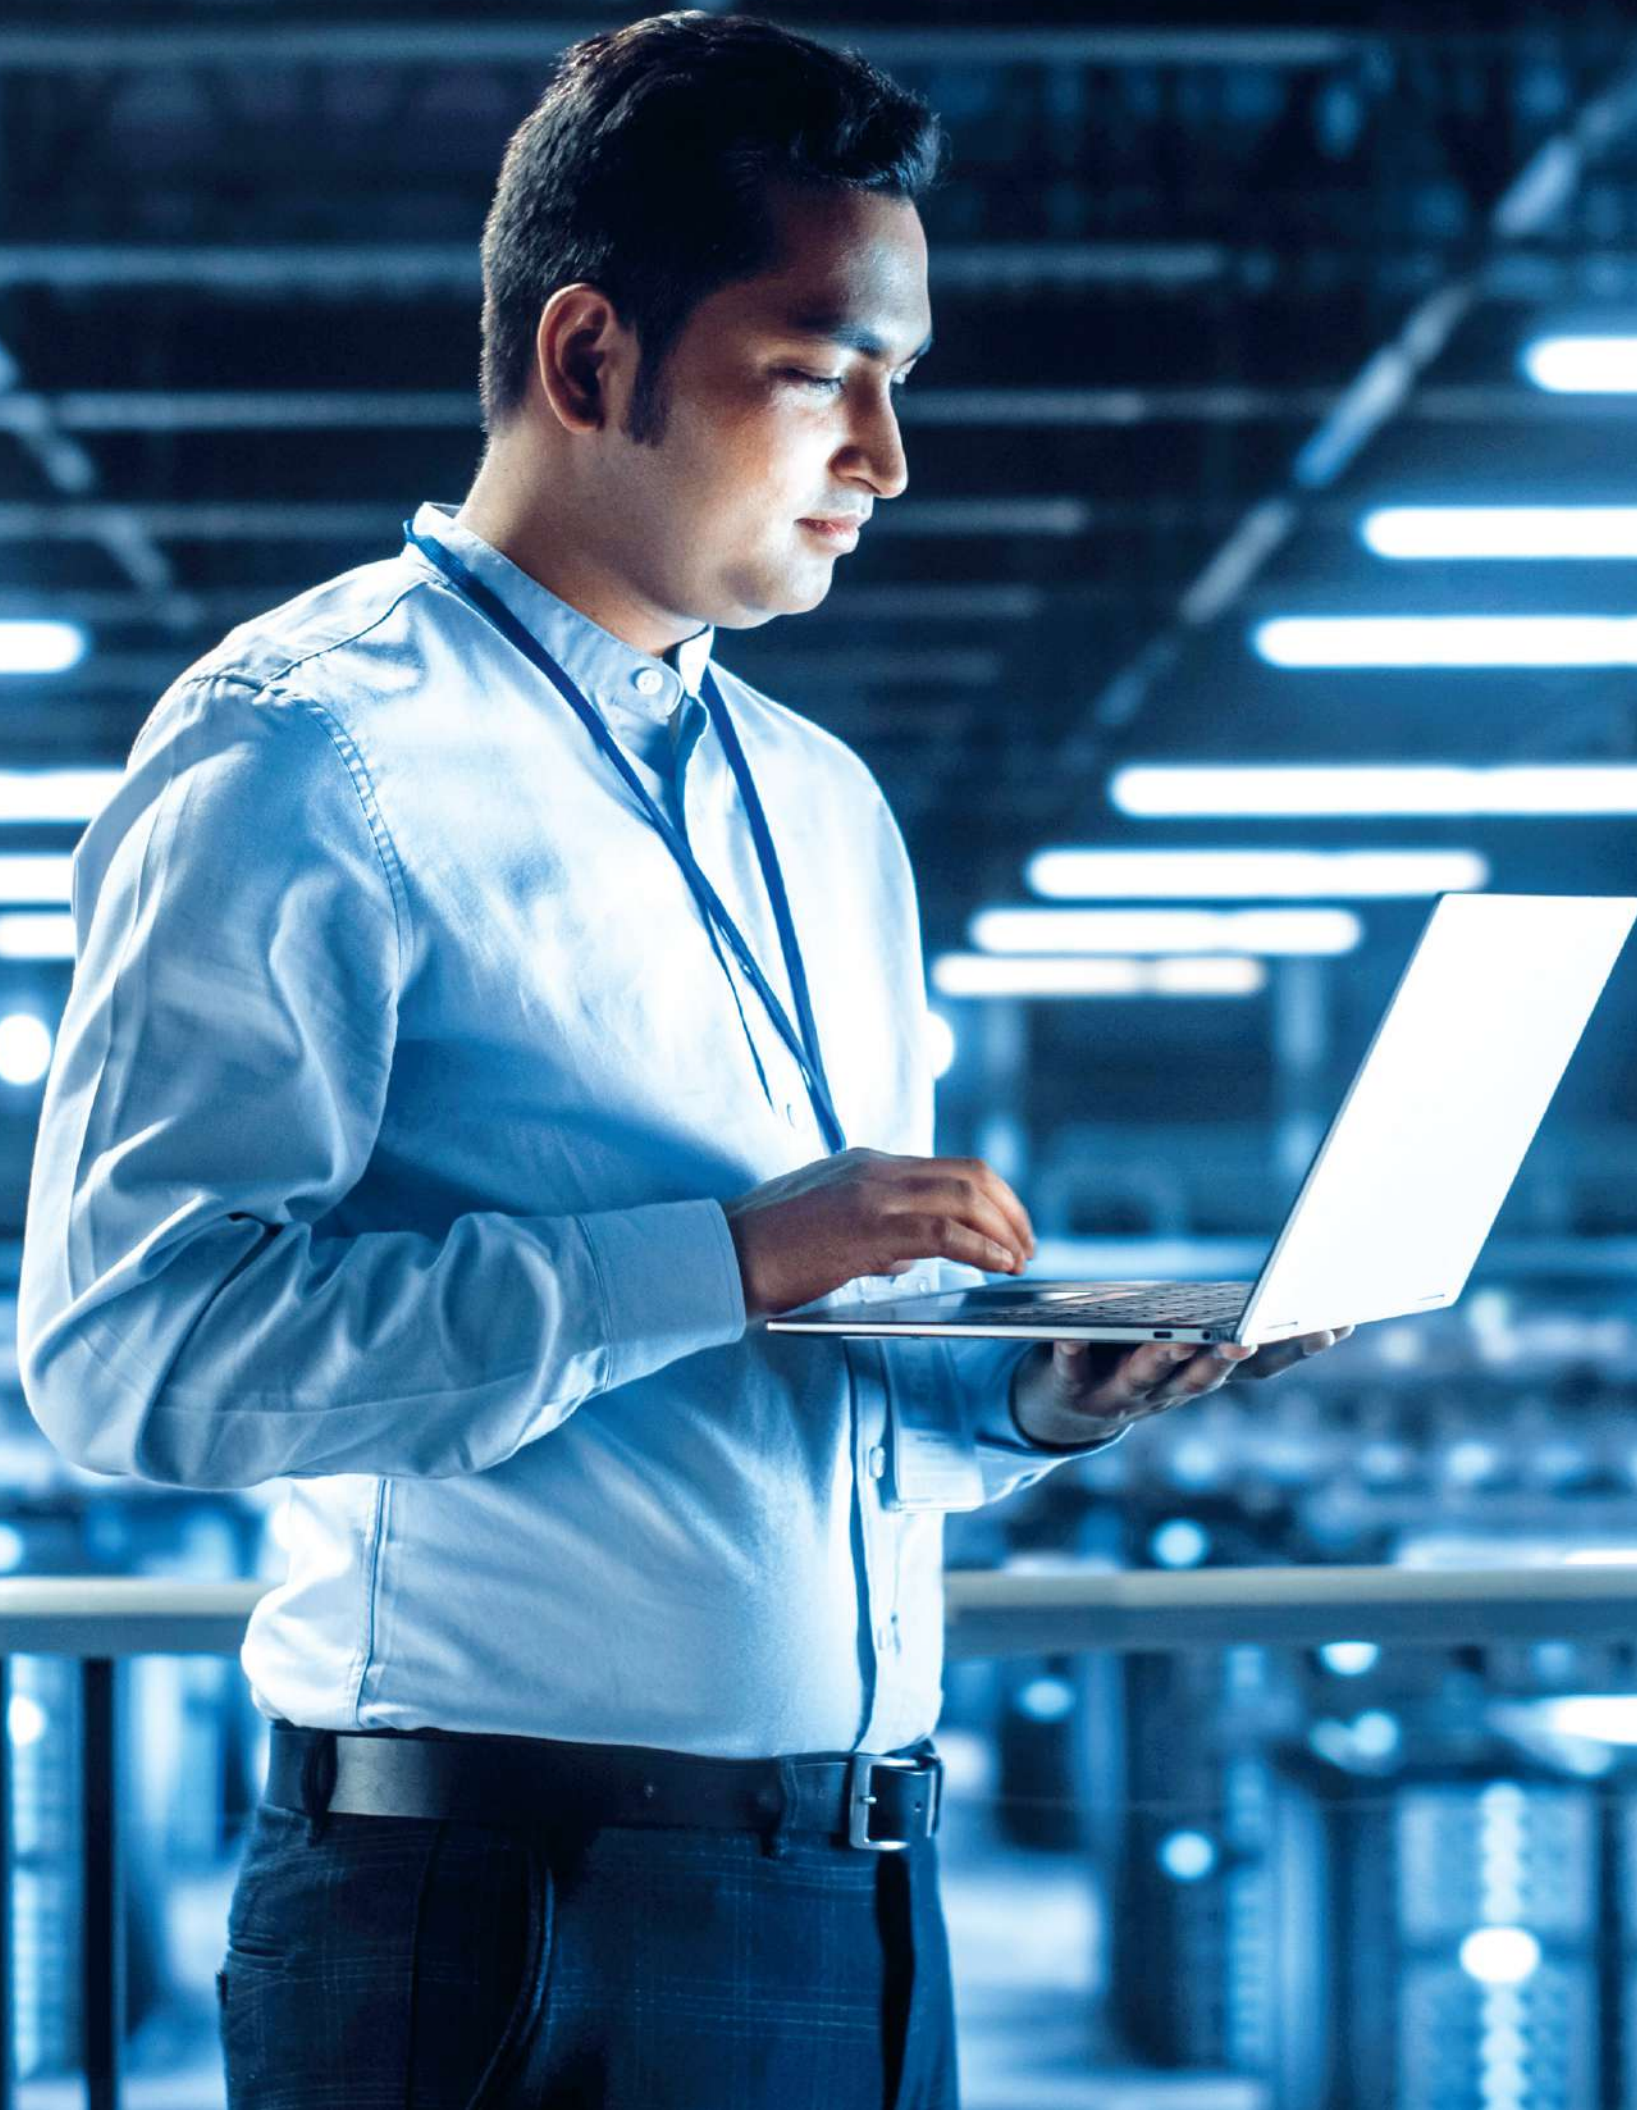



REGULUS LED BATTENS



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI

IP20

RoHS



BIS APPROVED

12W

Product Code: PPI-RGS-12W-LBN
Power Factor: >0.95
Opr. Voltage: AC 90V~300V,50Hz
Lumens : 1200 Lumens
Efficacy : 100 lm/W
Product Size : 590 (L) x 23 (W) x 29 (H) mm
End Cap : Grey
Master Pkg. : 50 Units

20W

Product Code: PPI-RGS-20W-LBN
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V,50Hz
Lumens : 2000 Lumens
Efficacy : 100 lm/W
Product Size : 1100 (L) x 23 (W) x 29 (H) mm
End Cap : Grey
Master Pkg. : 40 Units

40W

Product Code: PPI-RGS-40W-LBN
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V,50Hz
Lumens : 4000 Lumens
Efficacy : 100 lm/W
Product Size : 1180 (L) x 30 (W) x 38 (H) mm
End Cap : Grey
Master Pkg. : 25 Units

36W(MUSHROOM)

Product Code: PPI-RGS-36W-MLB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V,50Hz
Lumens : 3600 Lumens
Efficacy : 100 lm/W
Product Size : 1180 (L) x 30 (W) x 40 (H) mm
End Cap : Grey
Master Pkg. : 25 Units

40W(HIGH POWER)

Product Code: PPI-RGS-40W-HPB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V,50Hz
Lumens : 4000 Lumens
Efficacy : 100 lm/W
Product Size : 1200 (L) x 30 (W) x 38 (H) mm
End Cap : Grey
Master Pkg. : 20 Units

50W(HIGH POWER)

Product Code: PPI-RGS-50W-HPB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V,50Hz
Lumens : 5000 Lumens
Efficacy : 100 lm/W
Product Size : 1200 (L) x 60 (W) x 40 (H) mm
End Cap : Grey
Master Pkg. : 20 Units



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



SLEEK
DESIGN



OVERHEATING
PROTECTION




BRIGHT LIGHT
OUTPUT



1 YEAR
WARRANTY



BE THE SOURCE

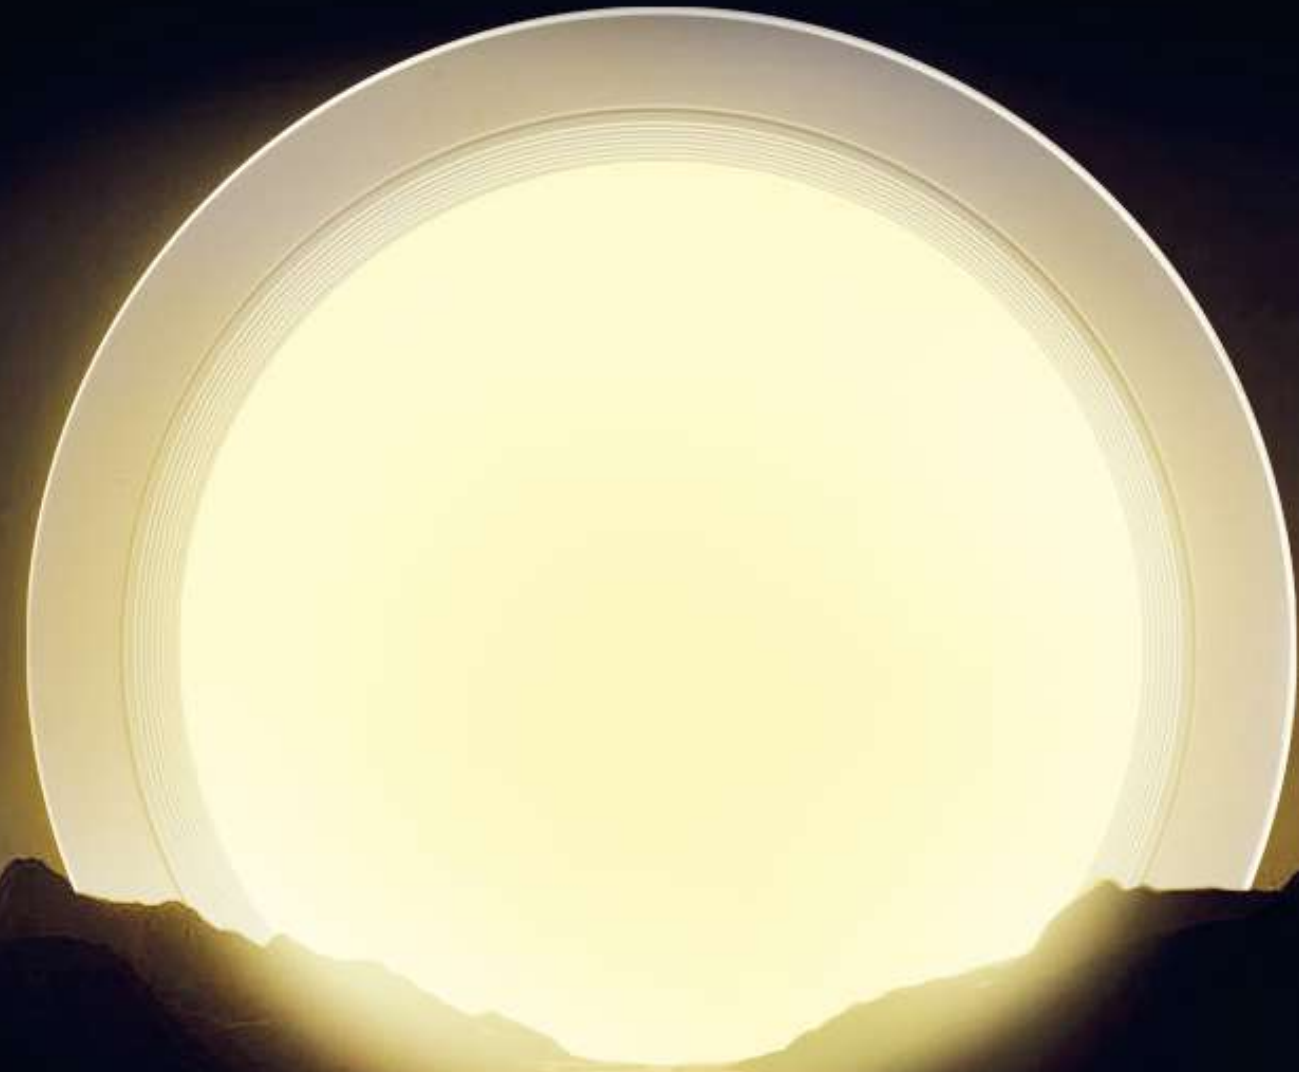

BE THE PERFECT HOST
SAIPH LED PANEL LIGHTS



SAIPH BACKLITE LED PANEL LIGHTS



- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- BIS APPROVED
- IP20
- RoHS

10W

Product Code: PPI-SIP-10W-BPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1000 Lumens
Efficacy: 100 lm/W
Round Size: 115 (Dia) x 35 (H) mm
Square Size: 115 (L) x 115 (W) x 35 (H) mm
Master Pkg.: 40 Units

15W

Product Code: PPI-SIP-15W-BPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Round Size: 145 (Dia) x 35 (H) mm
Square Size: 145 (L) x 145 (W) x 35 (H) mm
Master Pkg.: 40 Units

18W

Product Code: PPI-SIP-18W-BPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Round Size: 165 (Dia) x 35 (H) mm
Square Size: 165 (L) x 165 (W) x 35 (H) mm
Master Pkg.: 40 Units




CUTOUT

10W	15W	18W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")



- 4KV SURGE PROTECTION
- OVER VOLTAGE PROTECTION
- ELEGANT DESIGN
- ANTI GLARE DIFFUSER
- HIGH QUALITY POLYCARBONATE BUILT
- 2 YEARS WARRANTY

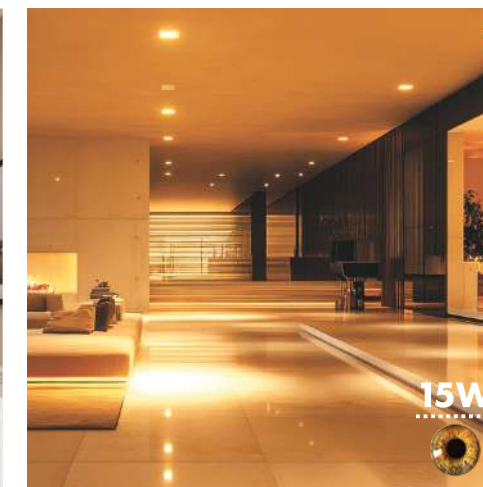



SAIPH EDGELITE LED PANEL LIGHTS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



8W

Product Code: PPI-SIP-8W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 800 Lumens

Efficacy: 100 lm/W

Round Size: 120 (Dia) x 25 (H) mm

Square Size: 120 (L) x 120 (W) x 25 (H) mm

Master Pkg.: 40 Units

12W

Product Code: PPI-SIP-12W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1200 Lumens

Efficacy: 100 lm/W

Round Size: 145 (Dia) x 25 (H) mm

Square Size: 145 (L) x 145 (W) x 25 (H) mm

Master Pkg.: 40 Units

15W

Product Code: PPI-SIP-15W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1500 Lumens

Efficacy: 100 lm/W

Round Size: 170 (Dia) x 25 (H) mm

Square Size: 170 (L) x 170 (W) x 25 (H) mm

Master Pkg.: 40 Units

20W

Product Code: PPI-SIP-20W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 2000 Lumens

Efficacy: 100 lm/W


Round Size: 220 (Dia) x 25 (H) mm

Square Size: 220 (L) x 220 (W) x 25 (H) mm

Master Pkg.: 40 Units



CUTOUT



8W	12W	15W	20W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")	Dia 200 mm (8")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")	200 (L) x 200 (W) mm (8")



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



ELEGANT
DESIGN



ANTI GLARE
DIFFUSER



HIGH QUALITY
POLYCARBONATE BUILT



2 YEARS
WARRANTY



8W



12W



20W

BE NATURAL
TRIANGULUM
LED PANEL LIGHTS





TRIANGULUM

TRICOLOUR BACKLITE LED PANEL LIGHTS



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



BIS APPROVED

IP20 | RoHS | Recycle | No Lead | No Mercury

10W

Product Code: PPI-TGM-10W-BPL 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1000 Lumens (Cool White)

Efficacy: 100 lm/W (Cool White)

Round Size: 115 (Dia) x 35 (H) mm

Square Size: 115 (L) x 115 (W) x 35 (H) mm

Master Pkg.: 40 Units

15W

Product Code: PPI-TGM-15W-BPL 3 IN 1

Power Factor: >0.95

Std. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1500 Lumens (Cool White)

Efficacy: 100 lm/W (Cool White)

Round Size: 145 (Dia) x 35 (H) mm

Square Size: 145 (L) x 145 (W) x 35 (H) mm

Master Pkg.: 40 Units

18W

Product Code: PPI-TGM-18W-BPL 3 IN 1

Power Factor: >0.95

Std. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1800 Lumens (Cool White)

Efficacy: 100 lm/W (Cool White)

Round Size: 165 (Dia) x 35 (H) mm

Square Size: 165 (L) x 165 (W) x 35 (H) mm

Master Pkg.: 40 Units

Note: *Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.

CUTOUT		
10W	15W	18W
 Dia 100 mm (4")	 Dia 125 mm (5")	 Dia 150 mm (6")
 100 (L) x 100 (W) mm (4")	 125 (L) x 125 (W) mm (5")	 150 (L) x 150 (W) mm (6")



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE
(6500K)



CLICK TWICE
FOR WARM WHITE
(3000K)



CLICK THRICE
FOR NEUTRAL WHITE
(4000K)



CLICK ONCE
FOR COOL WHITE
(6500K)



CLICK TWICE
FOR WARM WHITE
(3000K)



CLICK THRICE
FOR NEUTRAL WHITE
(4000K)



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



ELEGANT
DESIGN



3 IN 1 LIGHTING
APPLICATION



HIGH QUALITY
POLYCARBONATE BUILT



2 YEARS
WARRANTY



BE THE SOURCE

BE ELEGANT
PEGASUS LED PANEL LIGHTS



PEGASUS

NEO LED PANEL LIGHTS



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI

IP20

RoHS

RECYCLED

WARRANTY



BIS APPROVED

6W

Product Code: PPI-PGS-6W-NRP

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 540 Lumens

Efficacy: 90 lm/W

Round Size: 100 (Dia) x 27 (H) mm

Square Size: 100 (L) x 100 (W) x 27 (H) mm

Master Pkg.: 100 Units

12W

Product Code: PPI-PGS-12W-NRP

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 1080 Lumens

Efficacy: 90 lm/W

Round Size: 130 (Dia) x 27 (H) mm

Square Size: 130 (L) x 130 (W) x 27 (H) mm

Master Pkg.: 60 Units

15W

Product Code: PPI-PGS-15W-NRP

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 1350 Lumens

Efficacy: 90 lm/W

Round Size: 155 (Dia) x 27 (H) mm

Square Size: 155 (L) x 155 (W) x 27 (H) mm

Master Pkg.: 60 Units



CUTOUT



6W	12W	15W
Dia 75 mm (3")	Dia 100 mm (4")	Dia 125 mm (5")
75 (L) X 75 (W) mm (3")	100 (L) X (W) 100 mm (4")	125 (L) X 125 (W) mm (5")



SURGE PROTECTION



OVER VOLTAGE PROTECTION



DOB TECHNOLOGY



ANTI GLARE DIFFUSER



HIGH QUALITY POLYCARBONATE BUILT




2 YEARS WARRANTY



BE THE SOURCE

BE SPONTANEOUS
TAYGETA TWIN COLOUR LED PANEL LIGHTS

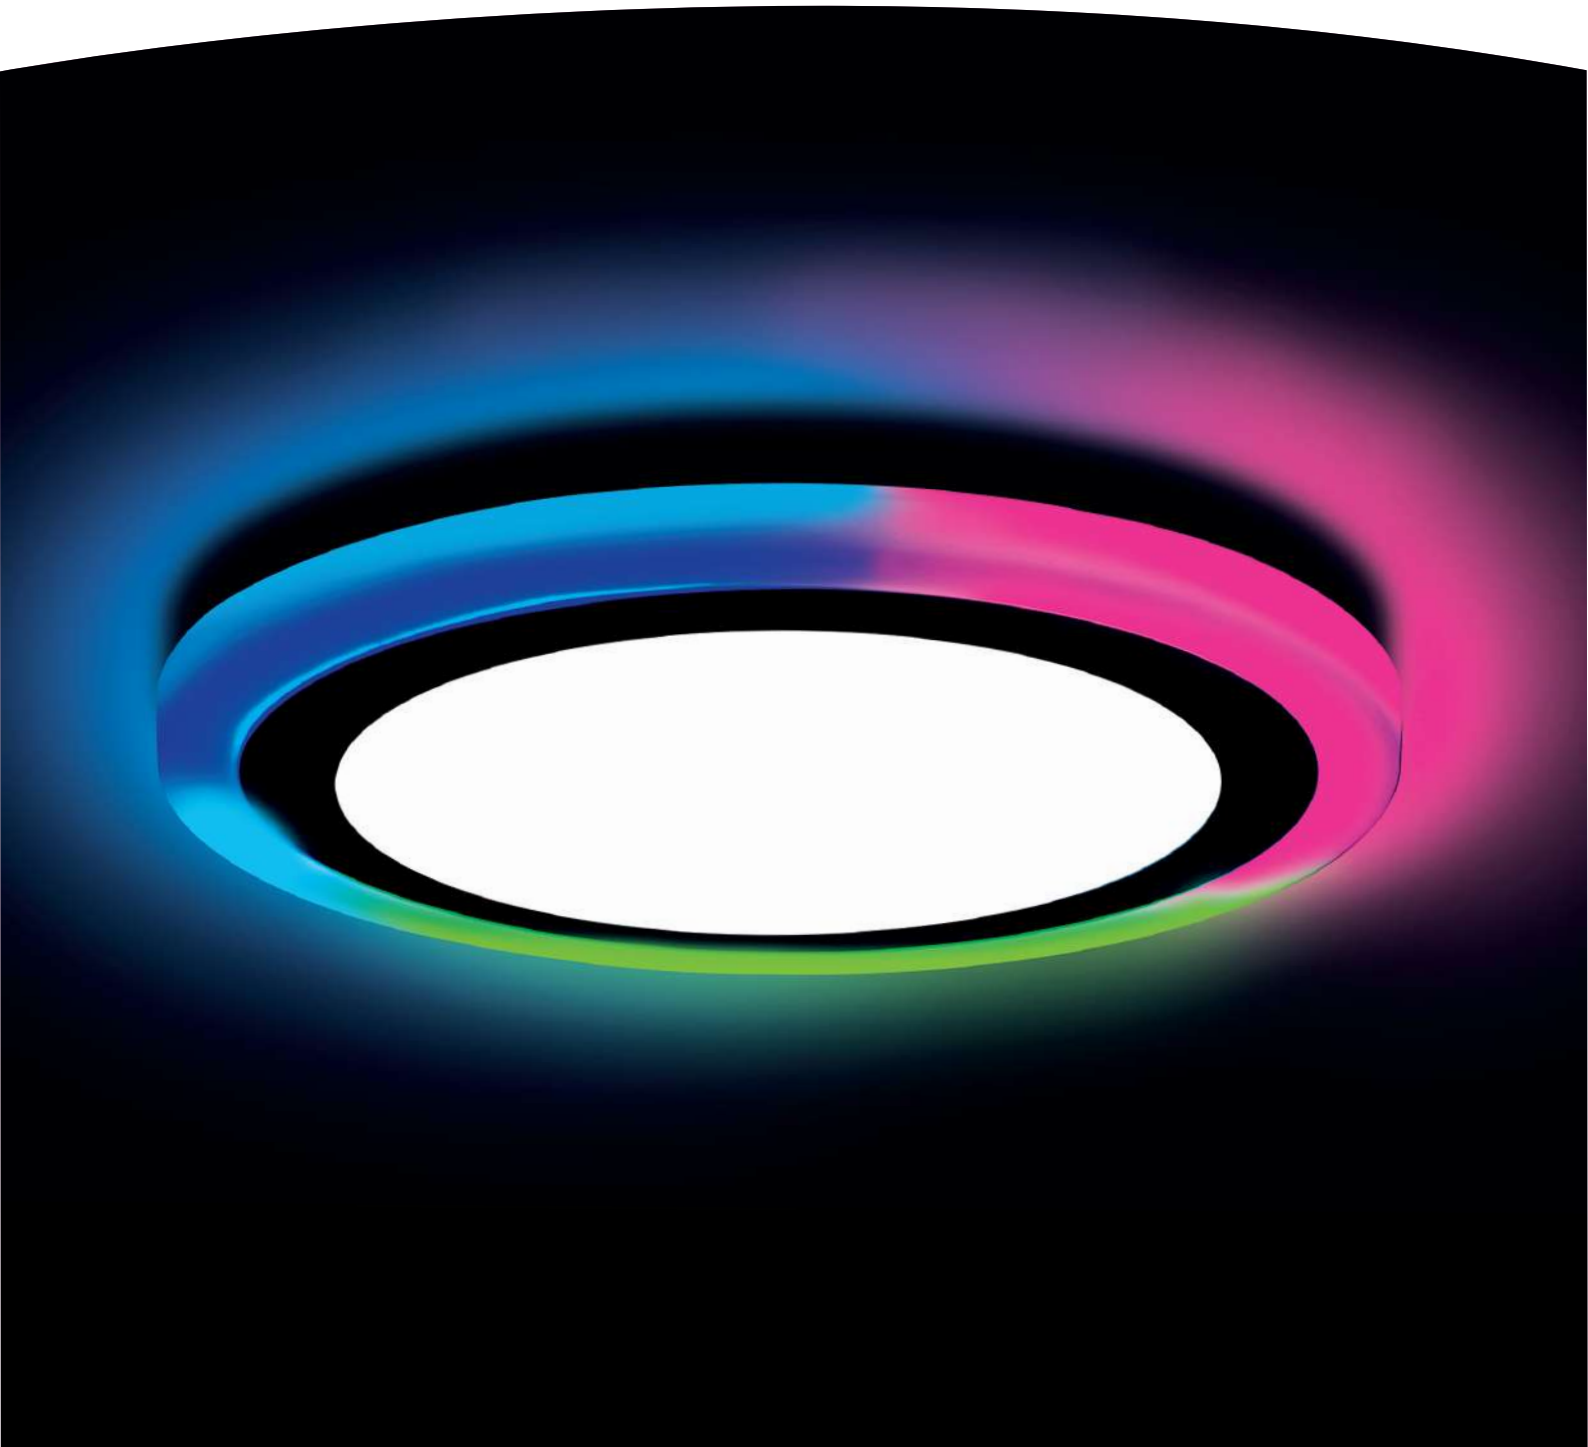

TAYGETA

TWIN COLOUR LED PANEL LIGHTS



ENERGY SAVINGS



90 LUMENS PER WATT (6500K)



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



BIS APPROVED

IP20 RoHS



3W+3W

Product Code: PPI-TGT-3W+3W-TCP

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 270 Lumens (Cool White)

Efficacy: 90 lm/W (Cool White)

Round Size: 105 (Dia) x 30 (H) mm

Square Size: 105 (L) x 105 (W) x 30 (H) mm

Master Pkg.: 60 Units

6W+6W

Product Code: PPI-TGT-6W+6W-TCP

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 540 Lumens (Cool White)

Efficacy: 90 lm/W (Cool White)

Round Size: 150 (Dia) x 32 (H) mm

Square Size: 150 (L) x 150 (W) x 32 (H) mm

Master Pkg.: 40 Units

12W+12W

Product Code: PPI-TGT-12W+12W-TCP

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1080 Lumens (Cool White)

Efficacy: 90 lm/W (Cool White)

Round Size: 200 (Dia) x 35 (H) mm

Square Size: 200 (L) x 200 (W) x 35 (H) mm

Master Pkg.: 40 Units

Note: *Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.

CUTOUT



3W+3W	6W+6W	12W+12W
Dia 70 mm	Dia 105 mm	Dia 155 mm
70 (L) x 70 (W) mm	105 (L) x 105 (W) mm	155 (L) x 155 (W) mm



SURGE PROTECTION



OVER VOLTAGE PROTECTION



3 IN 1 LIGHTING APPLICATION



TOGGLE SWITCH MECHANISM



FLUCTUATION PROOF



2 YEARS WARRANTY



BE THE SOURCE

BE MINIMALISTIC
CARINA SURFACE LED PANEL LIGHTS





CARINA

RIMLESS SURFACE LED PANEL LIGHTS



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



8W

Product Code: PPI-CRN-8W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 720 Lumens
Efficacy: 90 lm/W
Round Size: 90 (Dia) x 28 (H) mm
Square Size: 90 (L) x 90 (W) x 28 (H) mm
Master Pkg.: 40 Units

15W

Product Code: PPI-CRN-15W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1350 Lumens
Efficacy: 90 lm/W
Round Size: 120 (Dia) x 28 (H) mm
Square Size: 120 (L) x 120 (W) x 28 (H) mm
Master Pkg.: 40 Units

20W

Product Code: PPI-CRN-20W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 90 lm/W
Round Size: 155 (Dia) x 28 (H) mm
Square Size: 155 (L) x 155 (W) x 28 (H) mm
Master Pkg.: 40 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



RIMLESS DESIGN



ANTI GLARE DIFFUSER



HIGH QUALITY POLYCARBONATE BUILT




2 YEARS WARRANTY



BE JOYFUL
ALNILAM AL
LED PANEL LIGHTS



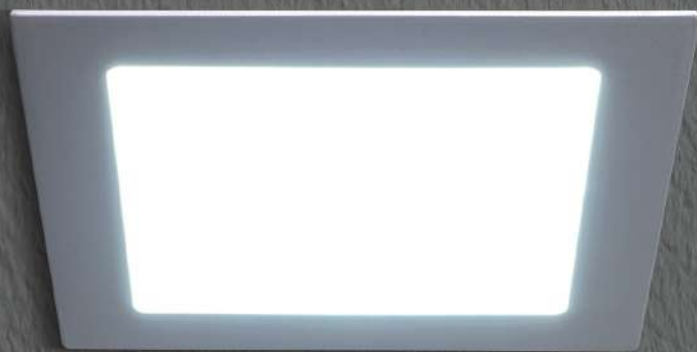

8W

Product Code: PPI-ALM-8W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 800 Lumens
Efficacy: 100 lm/W
Round Size: 120 (Dia) x 20 (H) mm
Square Size: 120 (L) x 120 (W) x 20 (H) mm
Master Pkg.: 40 Units

15W

Product Code: PPI-ALM-15W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Round Size: 170 (Dia) x 20 (H) mm
Square Size: 170 (L) x 170 (W) x 20 (H) mm
Master Pkg.: 40 Units

18W

Product Code: PPI-ALM-18W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Round Size: 225 (Dia) x 20 (H) mm
Square Size: 225 (L) x 225 (W) x 20 (H) mm
Master Pkg.: 40 Units

22W

Product Code: PPI-ALM-22W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 2200 Lumens
Efficacy: 100 lm/W
Round Size: 225 (Dia) x 20 (H) mm
Square Size: 225 (L) x 225 (W) x 20 (H) mm
Master Pkg.: 40 Units



CUTOUT

8W	15W	18W	22W
Dia 100 mm	Dia 155 mm	Dia 210 mm	Dia 210 mm
100 (L) x 100 (W) mm	155 (L) x 155 (W) mm	210 (L) x 210 (W) mm	210 (L) x 210 (W) mm



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



AL SLEEK
DESIGN



ANTI GLARE
DIFFUSER



HIGH GRADE
ALUMINIUM BUILT



2 YEARS
WARRANTY

ALNILAM AL EDGELITE LED PANEL LIGHTS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



BIS APPROVED

IP20 RoHS



8W



15W



18W



ALNILAM

AL DEEP DOWN LED PANEL LIGHTS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



12W

Product Code: PPI-ALM-12W-ADD

Power Factor: >0.90

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1080 Lumens

Efficacy: 90 lm/W

Round Size: 120 (Dia) x 50 (H) mm

Square Size: 120 (L) x 120 (W) x 50 (H) mm

Master Pkg.: 20 Units

18W

Product Code: PPI-ALM-18W-ADD

Power Factor: >0.90

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 1620 Lumens

Efficacy: 90 lm/W

Round Size: 155 (Dia) x 50 (H) mm

Square Size: 155 (L) x 155 (W) x 50 (H) mm

Master Pkg.: 20 Units

24W

Product Code: PPI-ALM-24W-ADD

Power Factor: >0.90

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 2160 Lumens

Efficacy: 90 lm/W


Round Size: 175 (Dia) x 50 (H) mm

Square Size: 175 (L) x 175 (W) x 50 (H) mm

Master Pkg.: 20 Units

CUTOUT

12W	18W	24W
Dia 110 mm	Dia 145 mm	Dia 165 mm
110 (L) x 110 (W) mm	145 (L) x 145 (W) mm	165 (L) x 165 (W) mm



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



ROBUST
DESIGN




ANTI GLARE
DIFFUSER



HIGH GRADE
ALUMINIUM BUILT




2 YEARS
WARRANTY

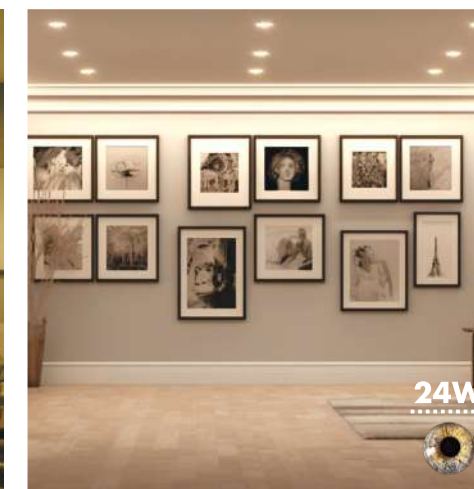

BE PLAYFUL
POLLUX 2X2 LED PANEL LIGHTS



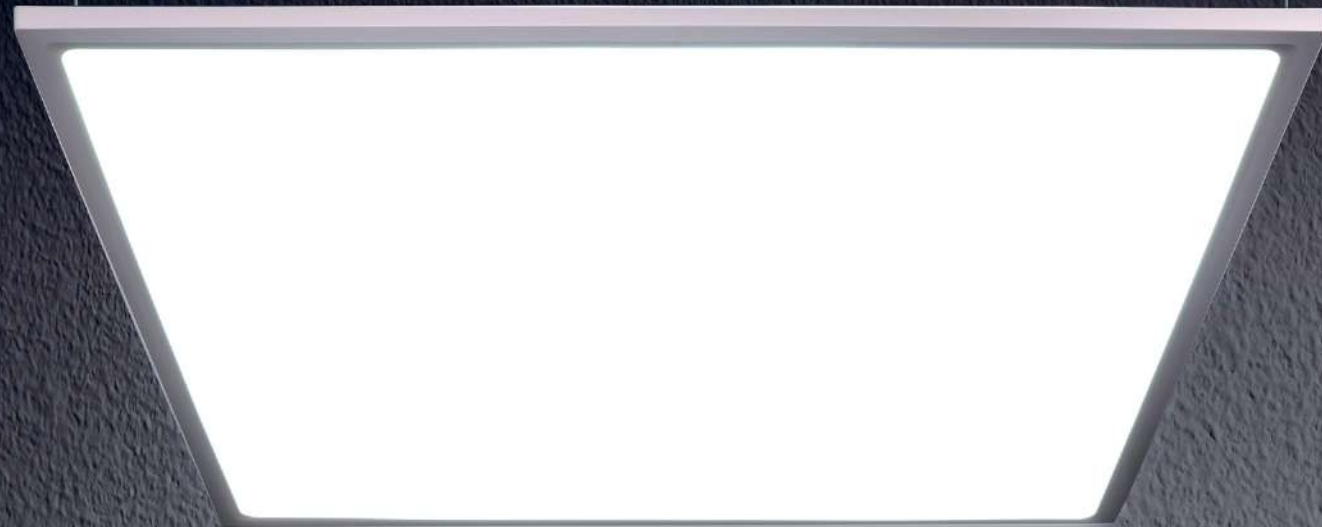

36W

Product Code: PPI-PLX-36W-TTP

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 3600 Lumens

Efficacy: 100 lm/W

Product Size: 600 (L) x 600 (W) x 33 (H) mm

Master Pkg.: 4 Units

45W

Product Code: PPI-PLX-45W-TTP

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 4500 Lumens


Efficacy: 100 lm/W

Product Size: 600 (L) x 600 (W) x 33 (H) mm

Master Pkg.: 4 Units

CUTOUT

590 (L) x 590 (W) mm



36W / 45W



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



AL SLEEK
DESIGN



ANTI GLARE
DIFFUSER



HIGH GRADE
ALUMINIUM BUILT



2 YEARS
WARRANTY

POLLUX 2X2 LED PANEL LIGHTS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI

IP20

RoHS



BE THE SOURCE

BE WARM
APUSTAR LED JUNCTION DOWNLIGHTS





APUSTAR

MINI LED JUNCTION DOWNLIGHTS



ENERGY SAVINGS



80 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI




3W

Product Code: PPI-APS-3W-MJD
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: : 240 Lumens
Efficacy: : 80 lm/W
Product Size: : 80 (Dia) x 35 (H) mm
Master Pkg.: : 100 Units

3W (3 IN 1 COLOUR)

Product Code: PPI-APS-3W-MJD 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens: : 240 Lumens (Cool White)
Efficacy: : 80 lm/W (Cool White)
Product Size: : 80 (Dia) x 35 (H) mm
Master Pkg.: : 100 Units

CUTOUT



Note: * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



SURGE PROTECTION



OVER VOLTAGE PROTECTION



3 IN 1 LIGHTING APPLICATION



TOGGLE SWITCH MECHANISM



BRIGHT LIGHT OUTPUT



1 YEAR WARRANTY





APUSTAR

COB LED JUNCTION DOWNLIGHTS



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI

IP20

RoHS

BIS APPROVED



BIS APPROVED

RECYCLE

WARRANTY

3W

Product Code: PPI-APS-3W-CJD

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 300 Lumens

Efficacy: 100 lm/W

Product Size: 80 (Dia) x 35 (H) mm

Master Pkg.: 100 Units

3W (3 IN 1 COLOUR)

Product Code: PPI-APS-3W-CJD 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz


Lumens: 300 Lumens (Cool White)

Efficacy: 100 lm/W (Cool White)

Product Size: 80 (Dia) x 35 (H) mm

Master Pkg.: 100 Units

CUTOUT



Note: * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



3 IN 1 CCT CHANGING
ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR WARM WHITE



CLICK THRICE
FOR NEUTRAL WHITE



4 WAY DEEP JUNCTION
BOX FITTING



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



3 IN 1 LIGHTING
APPLICATION



TOGGLE SWITCH
MECHANISM




BRIGHT LIGHT
OUTPUT



1 YEAR
WARRANTY



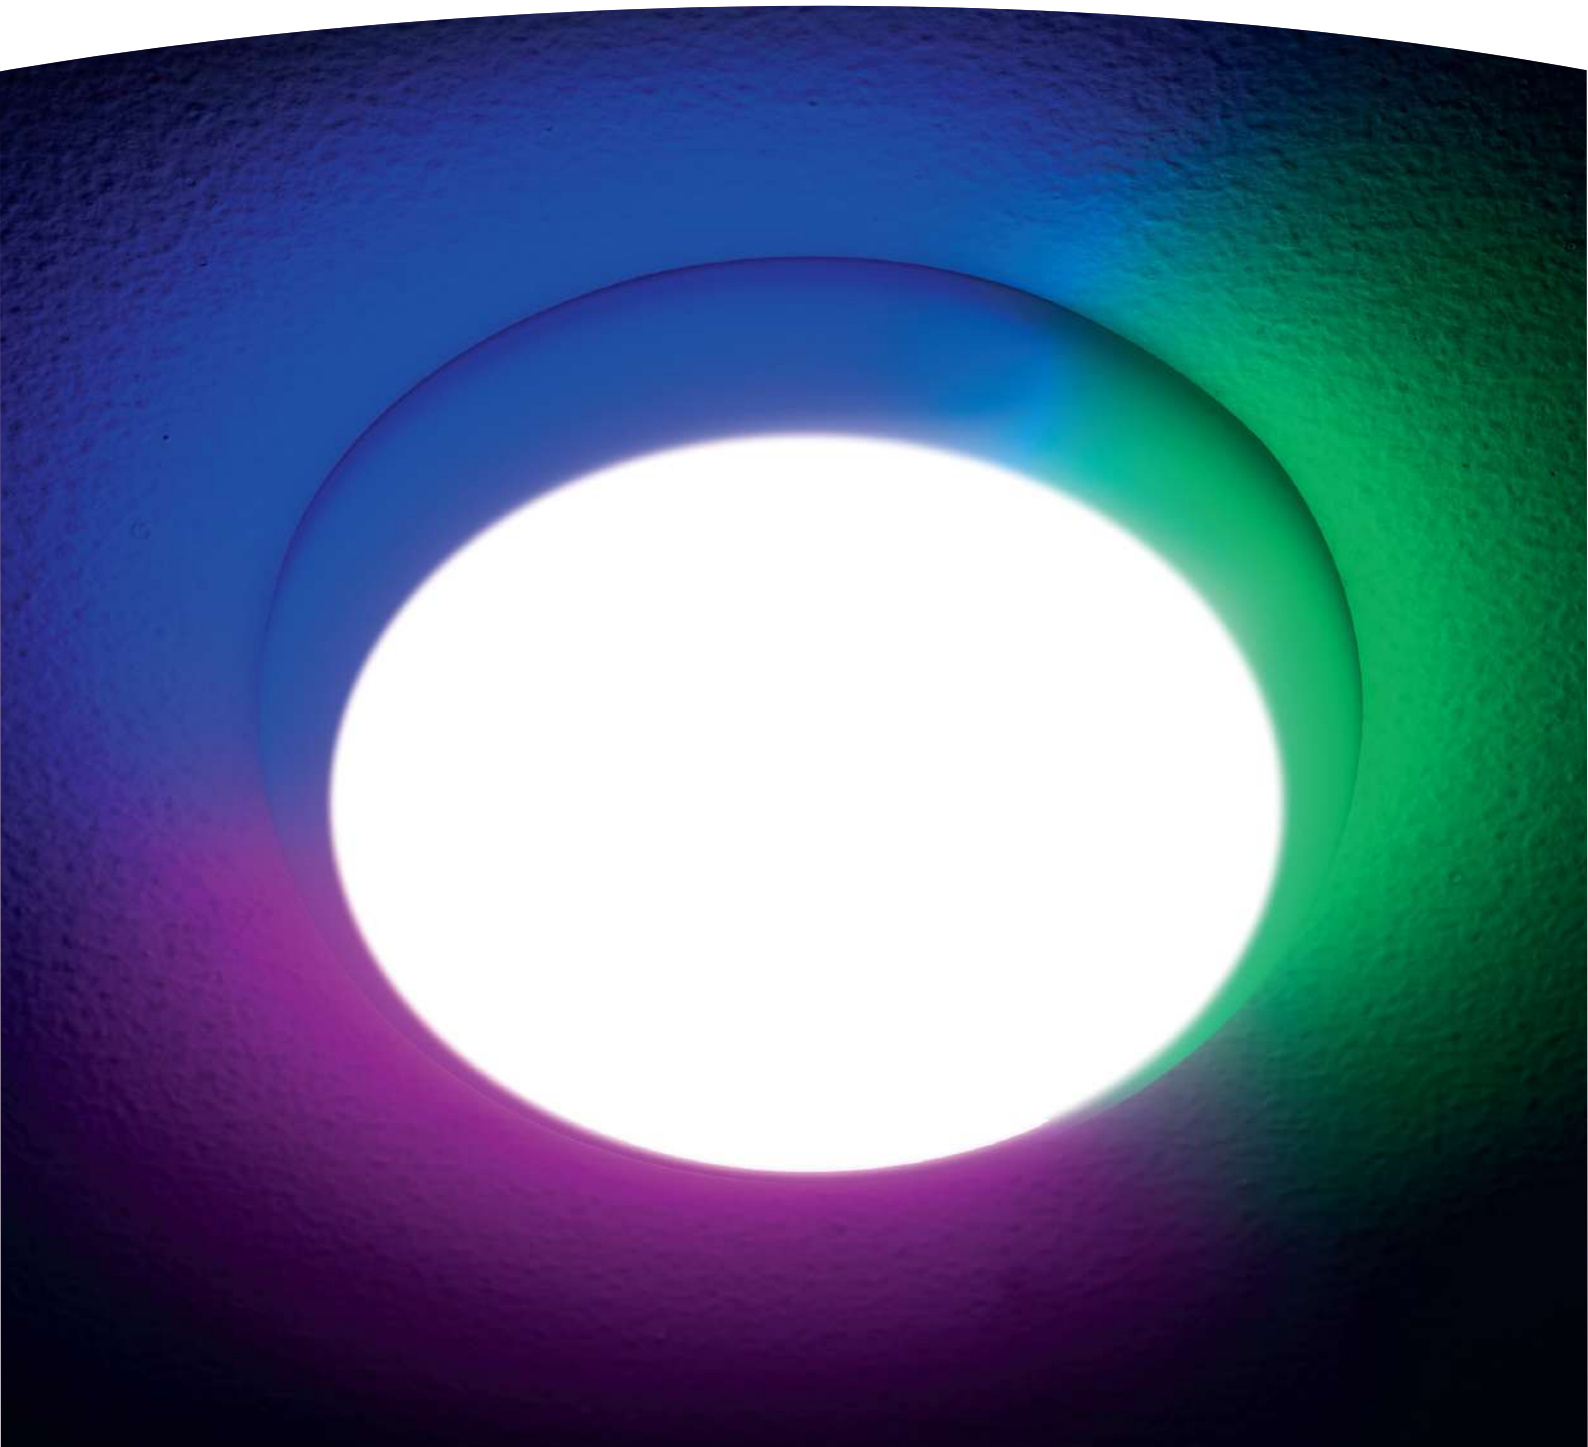

APUSTAR

TWIN COLOUR LED JUNCTION DOWNLIGHTS



ENERGY SAVINGS



100 LUMENS PER WATT (6500K)



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



8W+8W

Product Code: PPI-APS-8+8W-TCJ

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : 800 Lumens (Cool White)

Efficacy : 100 lm/W (Cool White)

Product Size : 88 (Dia) x 45 (H) mm

Cutout : 50 (Dia) mm

Master Pkg. : 100 Units

12W+12W

Product Code: PPI-APS-12+12W-TCJ

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : 1200 Lumens (Cool White)

Efficacy : 100 lm/W (Cool White)

Product Size : 130 (Dia) x 50 (H) mm

Cutout : 50 - 125 (Dia) mm Adjustable

Master Pkg. : 60 Units



4 WAY DEEP JUNCTION BOX FITTING


Note : * Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.




3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CUTOUT



8W + 8W



12W + 12W (ADJUSTABLE)



SURGE PROTECTION



OVER VOLTAGE PROTECTION



3 IN 1 LIGHTING APPLICATION



TOGGLE SWITCH MECHANISM



DECORATIVE FINISH



1 YEAR WARRANTY



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR PINK + GREEN + BLUE
(AT THE EDGES)



CLICK THRIE
FOR COOL WHITE &
PINK + GREEN + BLUE



APUSTAR

SLIM LED JUNCTION DOWNLIGHTS



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



BIS APPROVED

IP20 RoHS

7W

Product Code: PPI-APS-7W-SCJ

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 630 Lumens

Efficacy: 90 lm/W

Product Size: 110 (Dia) x 30 (H) mm

Cutout: 80 (Dia) mm

Master Pkg.: 100 Units

7W (3 IN 1 COLOUR)

Product Code: PPI-APS-7W-SCJ 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 630 Lumens (Cool White)

Efficacy: 90 lm/W (Cool White)

Product Size: 110 (Dia) x 30 (H) mm


Cutout: 80 (Dia) mm

Master Pkg.: 100 Units

Note: * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.

CUTOUT

80mm (Dia)



7W



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR WARM WHITE



CLICK THRICE
FOR NEUTRAL WHITE



4 WAY DEEP JUNCTION
BOX FITTING



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



3 IN 1 LIGHTING
APPLICATION



TOGGLE SWITCH
MECHANISM



BRIGHT LIGHT
OUTPUT



2 YEARS
WARRANTY



7W



7W



7W



APUSTAR

RIMLESS LED JUNCTION DOWNLIGHTS



- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- IP20
- RoHS
- BIS APPROVED


8W

Product Code: PPI-APS-8W-RJD
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 800 Lumens
Efficacy: 100 lm/W
Product Size: 85 (Dia) x 58 (H) mm
Cutout: 45 (Dia) mm
Master Pkg.: 100 Units

15W

Product Code: PPI-APS-15W-RJD
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Product Size: 140 (Dia) x 60 (H) mm
Cutout: 45 (Dia) mm
Master Pkg.: 60 Units

CUTOUT



4 WAY DEEP JUNCTION BOX FITTING



SURGE PROTECTION



OVER VOLTAGE PROTECTION



COMPACT DESIGN



ANTIGLARE DIFFUSER



HIGH QUALITY POLYCARBONATE BUILT



2 YEARS WARRANTY



BE THE SOURCE

BE ALIVE
BELLATRIX LED SPOTLIGHTS



BELLATRIX COB LED SPOTLIGHTS



ENERGY SAVINGS



80 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



JUNIOR LED SPOTLIGHT 2W

Product Code: PPI-BTX-2W-JSL

Power Factor: >0.50

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens : 160 Lumens

Efficacy : 80 lm/W

Product Size : 42 (Dia) x 18 (H) mm

Cutout : 32 (Dia) mm

Master Pkg. : 500 Units

FIXED COB LED SPOTLIGHT 3W

Product Code: PPI-BTX-3W-FSL

Power Factor: >0.95

Opr. Voltage: AC 100V ~ 300V, 50Hz



Lumens : 300 Lumens

Efficacy : 100 lm/W

Product Size : 80 (Dia) x 35 (H) mm

Cutout : 40 (Dia) mm

Master Pkg. : 100 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



SLEEK DESIGN



BRIGHT LIGHT OUTPUT



HIGH QUALITY COB CHIP



1 YEAR WARRANTY





BELLATRIX MOVABLE COB LED SPOTLIGHTS



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



MOVABLE COB LED SPOTLIGHT

3W

Product Code: PPI-BTX-3W-MSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 270 Lumens
Efficacy: 90 lm/W
Product Size: 70 (Dia) x 36 (H) mm
Master Pkg.: 100 Units

7W

Product Code: PPI-BTX-7W-MSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 630 Lumens
Efficacy: 90 lm/W
Product Size: 110 (Dia) x 50 (H) mm
Master Pkg.: 100 Units

12W

Product Code: PPI-BTX-12W-MSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1080 Lumens
Efficacy: 90 lm/W
Product Size: 150 (Dia) x 60 (H) mm
Master Pkg.: 60 Units

TRICOLOUR MOVABLE COB LED SPOTLIGHT

3W

Product Code: PPI-BTX-3W-MSL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 270 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Product Size: 70 (Dia) x 36 (H) mm
Master Pkg.: 100 Units

7W

Product Code: PPI-BTX-7W-MSL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 630 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Product Size: 110 (Dia) x 50 (H) mm
Master Pkg.: 100 Units

12W

Product Code: PPI-BTX-12W-MSL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1080 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Product Size: 150 (Dia) x 60 (H) mm
Master Pkg.: 60 Units

Note: *Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.

CUTOUT		
	DIA	mm
3W	7W	12W
Dia 55 mm	Dia 75 mm	Dia 120 mm



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



MOVABLE
DESIGN




BRIGHT LIGHT
OUTPUT



HIGH QUALITY
COB CHIP



2 YEARS
WARRANTY

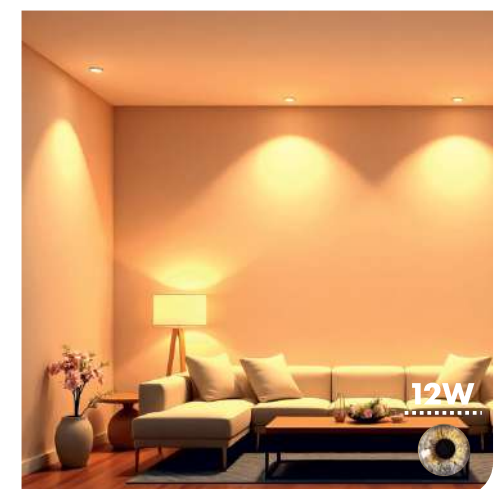

BE THE SOURCE

BE GLAMOROUS
ALNITAK COB LED SPOTLIGHTS





ALNITAK

DEEP COB LED SPOTLIGHTS



- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- IP20
- RoHS
- BIS APPROVED

7W

Product Code: PPI-ALT-7W-DCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 65 (Dia) x 60 (H) mm
Cutout: 55 (Dia) mm
Master Pkg.: 20 Units


12W

Product Code: PPI-ALT-12W-DCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 85 (Dia) x 76 (H) mm
Cutout: 75 (Dia) mm
Master Pkg.: 20 Units

18W

Product Code: PPI-ALT-18W-DCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 95 (Dia) x 100 (H) mm
Cutout: 85 (Dia) mm
Master Pkg.: 20 Units


Note: * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.

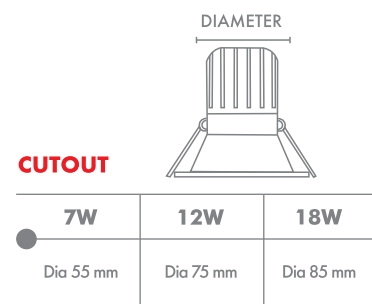

3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



- 4KV SURGE PROTECTION
- 440V OVER VOLTAGE PROTECTION
- HEAVY DUTY HEAT DISSIPATION
- AL HIGH GRADE ALUMINIUM BUILT
- HIGH QUALITY COB CHIP
- 2 YEARS WARRANTY

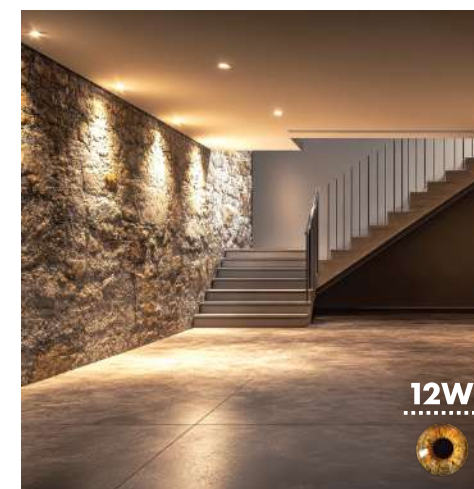



ALNITAK

PIXEL COB LED SPOTLIGHTS



- ENERGY SAVINGS
- 100 LUMENS PER WATT
- WIDE BEAM ANGLE
- LONG LIFE
- EXCELLENT CRI
- IP20
- RoHS
- BIS APPROVED

7W




Product Code: PPI-ALT-7W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 65 (Dia) x 63 (H) mm
Cutout: 55 (Dia) mm
Master Pkg.: 20 Units

12W

Product Code: PPI-ALT-12W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 85 (Dia) x 70 (H) mm
Cutout: 72 (Dia) mm
Master Pkg.: 20 Units


18W

Product Code: PPI-ALT-18W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 105 (Dia) x 83 (H) mm
Cutout: 95 (Dia) mm
Master Pkg.: 20 Units

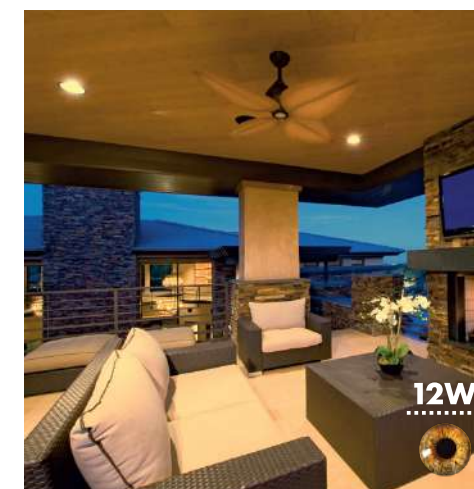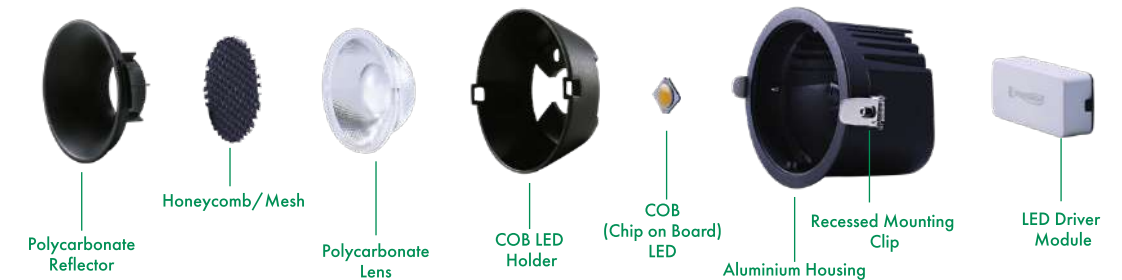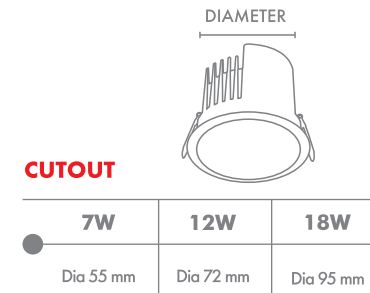



ALNITAK SURFACE CYLINDER COB LED SPOTLIGHTS

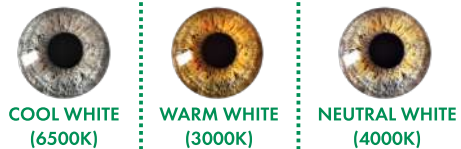

ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



7W

Product Code: PPI-ALT-7W-CCS
Power Factor: >0.50
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 55 (Dia) x 73 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

12W

Product Code: PPI-ALT-12W-CCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 75 (Dia) x 83 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

18W

Product Code: PPI-ALT-18W-CCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 97 (Dia) x 95 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION




HIGH GRADE
ALUMINIUM BUILT



HIGH QUALITY
COB CHIP



2 YEARS
WARRANTY

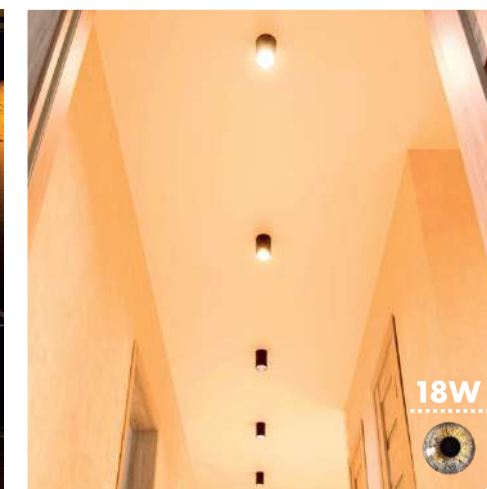



ALNITAK

SURFACE COB LED SPOTLIGHTS



10W


Product Code: PPI-ALT-10W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 900 Lumens
Efficacy: : 90 lm/W
Product Size: : 50 (Dia) x 60 (W) x 165 (H) mm
Cutout: : Surface Mounting
Master Pkg.: : 20 Units

20W

Product Code: PPI-ALT-20W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 1800 Lumens
Efficacy: : 90 lm/W
Product Size: : 65 (Dia) x 70 (W) x 195 (H) mm
Cutout: : Surface Mounting
Master Pkg.: : 20 Units

30W

Product Code: PPI-ALT-30W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 2700 Lumens
Efficacy: : 90 lm/W
Product Size: : 75 (Dia) x 70 (W) x 215 (H) mm
Cutout: : Surface Mounting
Master Pkg.: : 20 Units

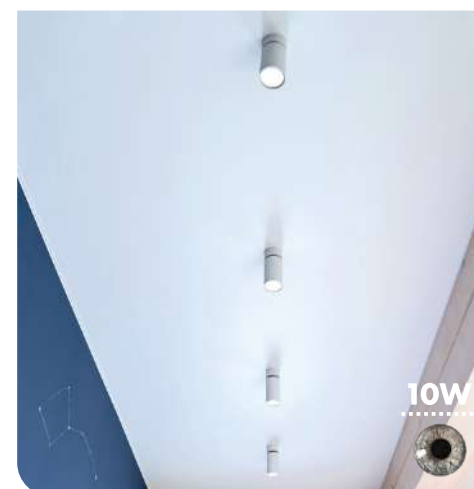



ALNITAK

MOVABLE COB LED TRACK SPOTLIGHTS



10W

Product Code: PPI-ALT-10W-MTS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 900 Lumens
Efficacy: 90 lm/W
Product Size: 50 (Dia) x 85 (W) x 175 (H) mm
Cutout: Track Mounting
Master Pkg.: 20 Units

20W

Product Code: PPI-ALT-20W-MTS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 90 lm/W
Product Size: 65 (Dia) x 85 (W) x 205 (H) mm
Cutout: Track Mounting
Master Pkg.: 20 Units

30W

Product Code: PPI-ALT-30W-MTS
Power Factor: >0.90
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 2700 Lumens
Efficacy: 90 lm/W
Product Size: 75 (Dia) x 85 (W) x 225 (H) mm
Cutout: Track Mounting
Master Pkg.: 20 Units



BE THE SOURCE

BE BOLD
VELORUM DECORATIVE
LED LIGHTS





VELORUM LED STRIP LIGHTS



ENERGY SAVINGS



INGRESS PROTECTION



5 METER ROLL



DECORATIVE LIGHTING



EXCELLENT CRI



25W (60 LED/METER)

Product Code: PPI-VRM-25W-1260-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 450 Lumens / Meter

Cutting Unit : After Each 1 Meter

Roll Size : 100 (Dia) x 15 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

40W (120 LED/METER)

Product Code: PPI-VRM-40W-1212-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 720 Lumens / Meter

Cutting Unit : After Each 1 Meter

Roll Size : 100 (Dia) x 15 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

60W (180 LED/METER)

Product Code: PPI-VRM-60W-1218-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 1080 Lumens / Meter

Cutting Unit : After Each 1 Meter

Roll Size : 130 (Dia) x 20 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

75W (240 LED/METER)

Product Code: PPI-VRM-75W-1224-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 1350 Lumens / Meter

Cutting Unit : After Each 1 Meter

Roll Size : 130 (Dia) x 20 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units



Note : *Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.



LONG LIFE



ECO FRIENDLY



EASY INSTALLATION
USING ADHESIVE TAPE




LM80 CERTIFIED
LED CHIP




MAINTENANCE
FREE



INDOOR
USE ONLY

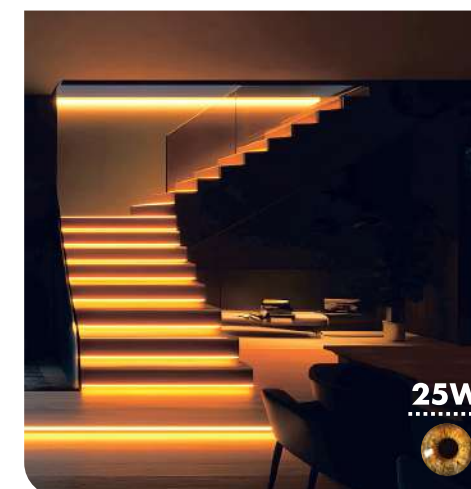

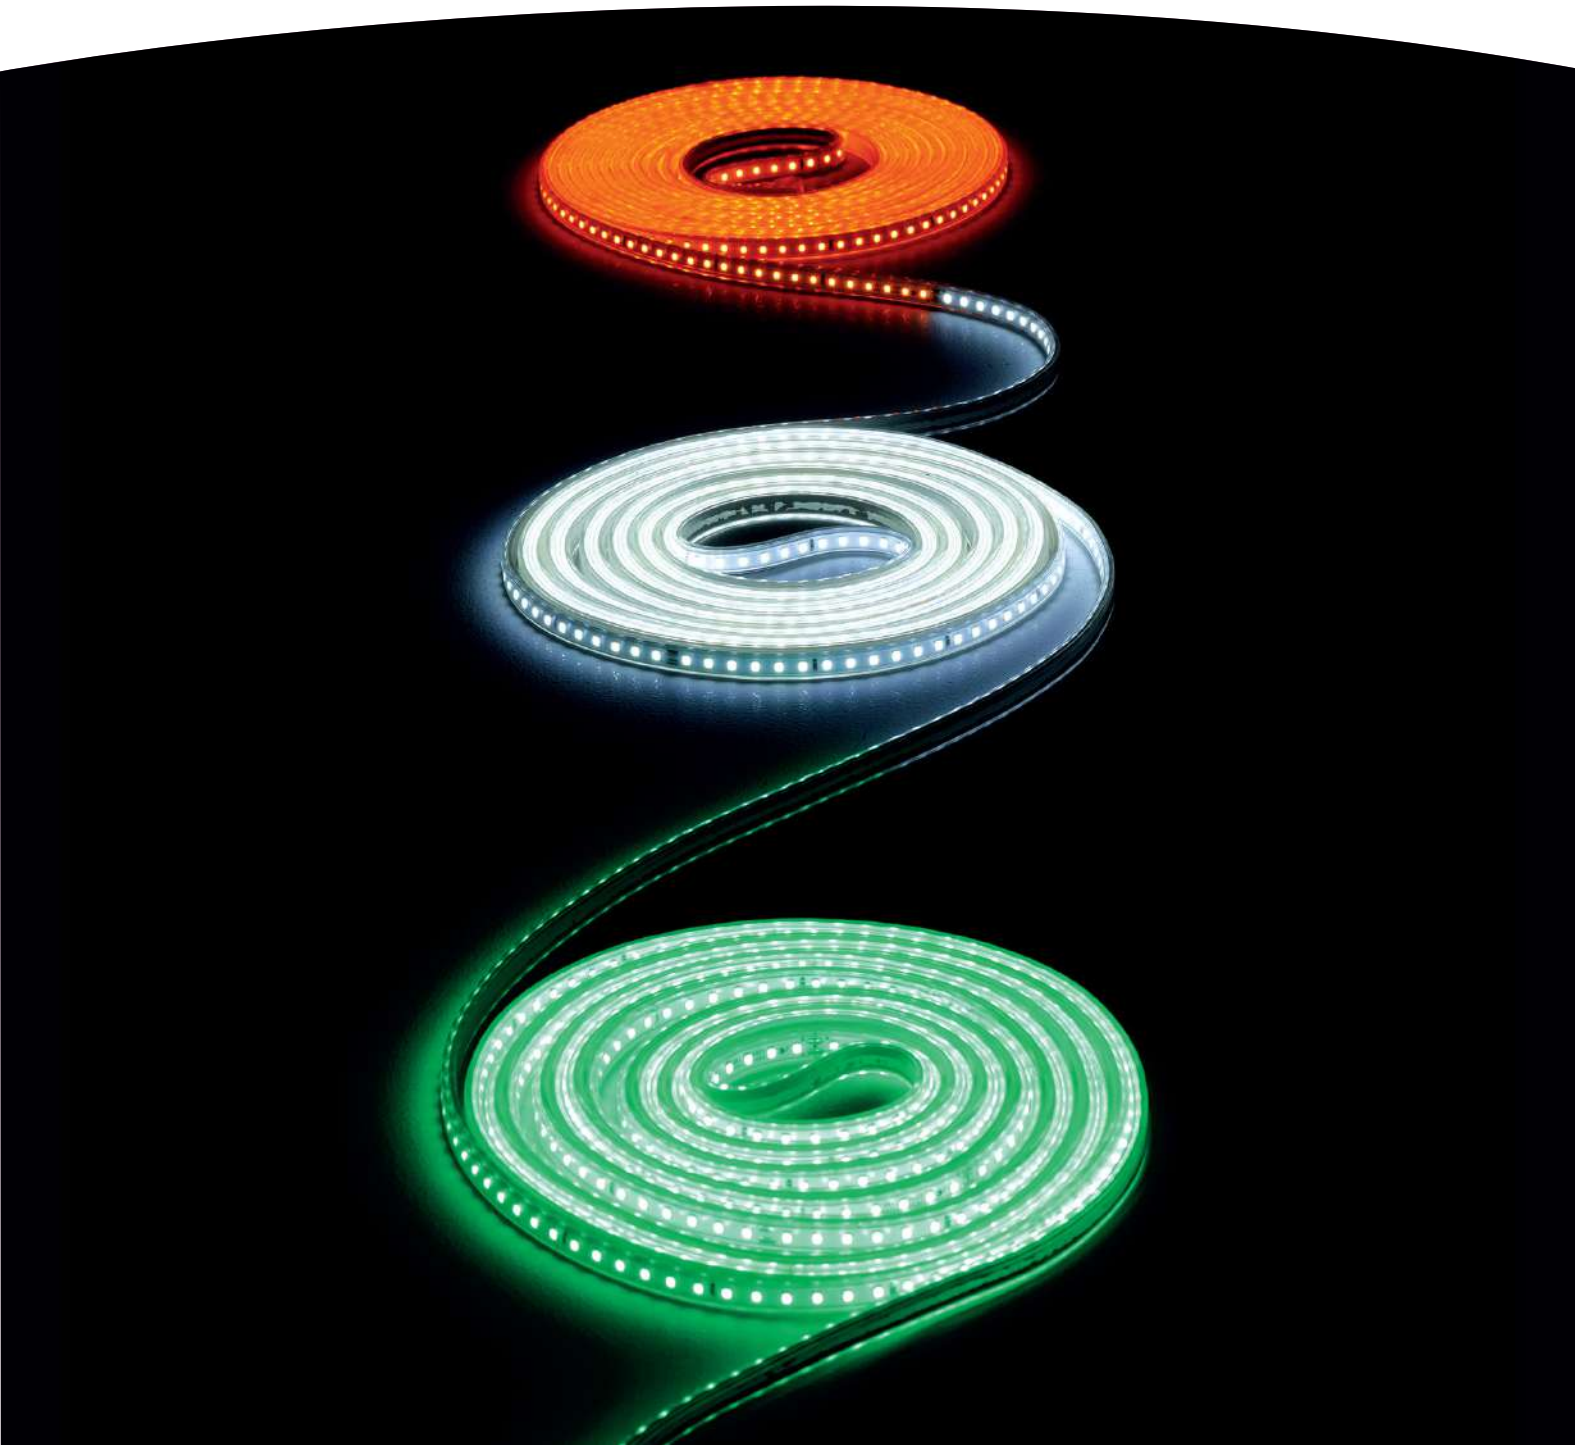

VELORUM LED ROPE LIGHTS



ENERGY
SAVINGS



INGRESS
PROTECTION



45/18
METER ROLL



DECORATIVE
LIGHTING



EXCELLENT
CRI



BIS APPROVED

IP65 | RoHS | Recycle | No Lead | No Mercury

6W/M (60 LED/METER)

Product Code: PPI-VRM-6WPM-60-DRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : 540 Lumens / Meter

LED Size : 2835/2850

Roll Size : 255 (Dia) x 120 (H) mm

Rope Length : 45 Meter

Master Pkg. : 8 Units

8W/M (120 LED/METER)

Product Code: PPI-VRM-8WPM-120-DRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : 720 Lumens / Meter

LED Size : 2835/2850

Roll Size : 255 (Dia) x 120 (H) mm

Rope Length : 45 Meter

Master Pkg. : 8 Units

6W/M (60 LED/METER)

Product Code: PPI-VRM-6WPM-60-TRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : Tiranga Colour

Colour : Orange - White - Green

Roll Size : 150 (Dia) x 70 (H) mm

Rope Length : 18 Meter

Master Pkg. : 12 Units

8W/M (120 LED/METER)

Product Code: PPI-VRM-8WPM-120-TRL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens : Tiranga Colour

Colour : Orange - White - Green

Roll Size : 150 (Dia) x 70 (H) mm

Rope Length : 18 Meter

Master Pkg. : 12 Units



AC RECTIFIER KIT

Product Code: PPI-VRM-ACDC-RRL

Power Factor: >0.95


Opr. Voltage: AC 90V~300V, 50Hz

Product Size : 50 (L) x 20 (W) x 30 (H) mm

IP Protection: IP66

Master Pkg. : 50 Units

Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.

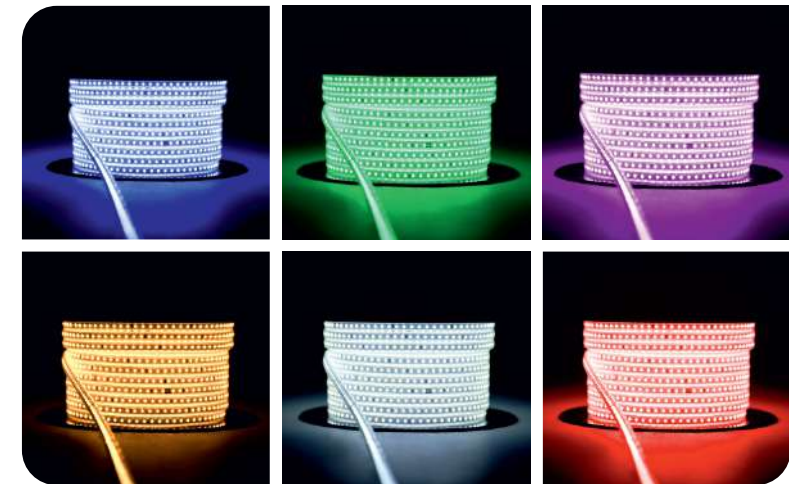

SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY
FLEXIBLE PRODUCT



LM80 CERTIFIED
LED CHIP



NEON SILICON TUBE
CLEAR COVER




2 YEARS
WARRANTY



8W



6W

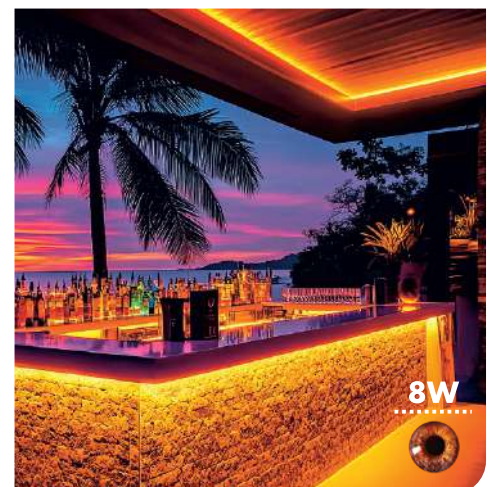

8W


BE ADVENTUROUS
CENTAURUS LED STREET LIGHTS





CENTAURUS

OVAL LENS LED STREET LIGHTS



ENERGY SAVINGS



110 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI

IP65 RoHS



BIS APPROVED



24W

Product Code: PPI-CRS-24W-OSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 2640 Lumens
Efficacy: : 110 lm/W
Product Size: : 262 (L) x 120 (W) x 55 (H) mm
Pole Diameter: : 45 (Dia) mm
Master Pkg.: : 30 Units

36W

Product Code: PPI-CRS-36W-OSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 3960 Lumens
Efficacy: : 110 lm/W
Product Size: : 295 (L) x 145 (W) x 55 (H) mm
Pole Diameter: : 45 (Dia) mm
Master Pkg.: : 20 Units

50W

Product Code: PPI-CRS-50W-OSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 5500 Lumens
Efficacy: : 110 lm/W
Product Size: : 345 (L) x 175 (W) x 55 (H) mm
Pole Diameter: : 50 (Dia) mm
Master Pkg.: : 20 Units

100W

Product Code: PPI-CRS-100W-OSL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: : 11000 Lumens
Efficacy: : 110 lm/W
Product Size: : 385 (L) x 200 (W) x 60 (H) mm
Pole Diameter: : 55 (Dia) mm
Master Pkg.: : 10 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION




ALUMINIUM DIE CAST BODY



HIGH GRADE POLYCARBONATE DIFFUSER




2 YEARS WARRANTY

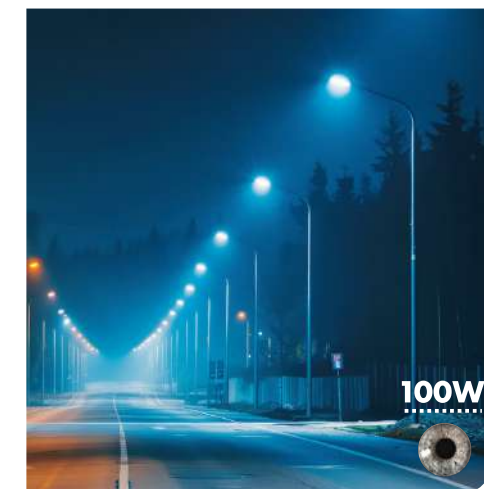



CENTAURUS

LENS LED STREET LIGHTS



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI

IP65

RoHS



20W

Product Code: PPI-CRS-20W-LSL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 2000 Lumens

Efficacy: 100 lm/W

Product Size: 280 (L) x 105 (W) x 55 (H) mm

Pole Diameter: 45 (Dia) mm

Master Pkg.: 30 Units

30W

Product Code: PPI-CRS-30W-LSL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 3000 Lumens

Efficacy: 100 lm/W

Product Size: 320 (L) x 125 (W) x 55 (H) mm

Pole Diameter: 45 (Dia) mm

Master Pkg.: 20 Units

50W

Product Code: PPI-CRS-50W-LSL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 5000 Lumens

Efficacy: 100 lm/W

Product Size: 375 (L) x 165 (W) x 60 (H) mm

Pole Diameter: 45 (Dia) mm

Master Pkg.: 20 Units

100W

Product Code: PPI-CRS-100W-LSL

Power Factor: >0.95

Opr. Voltage: AC 90V ~ 300V, 50Hz

Lumens: 10000 Lumens

Efficacy: 100 lm/W

Product Size: 475 (L) x 205 (W) x 65 (H) mm

Pole Diameter: 50 (Dia) mm

Master Pkg.: 10 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION



ALUMINIUM DIE CAST BODY



HIGH GRADE POLYCARBONATE DIFFUSER



2 YEARS WARRANTY



BE THE SOURCE

BE SEEN
MINTAKA
LED FLOOD LIGHTS



MINTAKA

LENS LED FLOOD LIGHTS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI

IP66

RoHS

RECYCLE

WARRANTY



BIS APPROVED

30W

Product Code: PPI-MTK-30W-LFL

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 3000 Lumens

Efficacy: 100lm/W

Product Size: 210 (L) x 150 (W) x 25 (H) mm

Mount Type: Bracket Mounting

Master Pkg.: 30 Units

50W

Product Code: PPI-MTK-50W-LFL

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 5000 Lumens

Efficacy: 100 lm/W

Product Size: 210 (L) x 150 (W) x 25 (H) mm

Mount Type: Bracket Mounting

Master Pkg.: 30 Units

100W

Product Code: PPI-MTK-100W-LFL

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 10000 Lumens

Efficacy: 100 lm/W

Product Size: 260 (L) x 200 (W) x 25 (H) mm

Mount Type: Bracket Mounting

Master Pkg.: 20 Units

200W

Product Code: PPI-MTK-200W-LFL

Power Factor: >0.90

Opr. Voltage: AC 100V ~ 300V, 50Hz

Lumens: 20000 Lumens

Efficacy: 100 lm/W

Product Size: 350 (L) x 250 (W) x 25 (H) mm

Mount Type: Bracket Mounting

Master Pkg.: 20 Units



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER



2 YEARS
WARRANTY





MINTAKA TUBULAR LENS LED FLOOD LIGHTS



ENERGY
SAVINGS



105 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI

IP66 | RoHS | BIS APPROVED

30W

Product Code: PPI-MTK-30W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 3150 Lumens
Efficacy: 105 lm/W
Product Size: 190 (L) x 160 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 30 Units

50W

Product Code: PPI-MTK-50W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 5250 Lumens
Efficacy: 105 lm/W
Product Size: 210 (L) x 195 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

100W

Product Code: PPI-MTK-100W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 10500 Lumens
Efficacy: 105 lm/W
Product Size: 270 (L) x 240 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

150W

Product Code: PPI-MTK-150W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 15750 Lumens
Efficacy: 105 lm/W
Product Size: 320 (L) x 280 (W) x 35 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units

200W

Product Code: PPI-MTK-200W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 21000 Lumens
Efficacy: 105 lm/W
Product Size: 320 (L) x 280 (W) x 35 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER




2 YEARS
WARRANTY





MINTAKA

TG LED FLOOD LIGHTS



ENERGY SAVINGS



110 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI

IP66 | RoHS | BIS APPROVED



BIS APPROVED

30W

Product Code: PPI-MTK-30W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens : 3300 Lumens
Efficacy : 110 lm/W
Product Size : 185 (L) x 180 (W) x 45 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 20 Units

200W

Product Code: PPI-MTK-200W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens : 22000 Lumens
Efficacy : 110 lm/W
Product Size : 335 (L) x 315 (W) x 60 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 10 Units

50W

Product Code: PPI-MTK-50W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens : 5500 Lumens
Efficacy : 110 lm/W
Product Size : 230 (L) x 225 (W) x 50 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 20 Units

50W-N

Product Code: PPI-MTK-50W-N-GFL
Power Factor: >0.90
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens : 5000 Lumens
Efficacy : 100 lm/W
Product Size : 185 (L) x 180 (W) x 45 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 20 Units

100W


Product Code: PPI-MTK-100W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens : 11000 Lumens
Efficacy : 110 lm/W
Product Size : 290 (L) x 290 (W) x 60 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 10 Units

100W-N

Product Code: PPI-MTK-100W-N-GFL
Power Factor: >0.90
Opr. Voltage: AC 100V ~ 300V, 50Hz
Lumens : 10000 Lumens
Efficacy : 100 lm/W
Product Size : 230 (L) x 225 (W) x 50 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 20 Units

150W

Product Code: PPI-MTK-150W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens : 16500 Lumens
Efficacy : 110 lm/W
Product Size : 285 (L) x 275 (W) x 60 (H) mm
Mount Type : Bracket Mounting
Master Pkg. : 10 Units

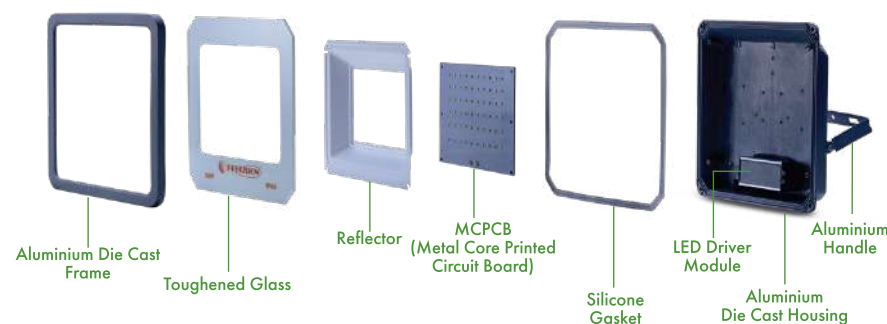

SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION



HIGH QUALITY ALUMINIUM GRADE



HIGH THICKNESS TOUGHENED GLASS



2 YEARS WARRANTY



BE THE SOURCE

BE EFFICIENT
PROCYON LED Highbay Lights



PROCYON

LENS LED Highbay Lights



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI



BIS APPROVED

IP66

RoHS



50W

Product Code: PPI-PCN-50W-LHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 5000 Lumens
Efficacy: 100 lm/W
Product Size: 245 (Dia) x 120 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 6 Units

100W

Product Code: PPI-PCN-100W-LHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 10000 Lumens
Efficacy: 100 lm/W
Product Size: 245 (Dia) x 120 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 6 Units

150W

Product Code: PPI-PCN-150W-LHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 15000 Lumens
Efficacy: 100 lm/W
Product Size: 340 (Dia) x 130 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 4 Units

200W

Product Code: PPI-PCN-200W-LHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 20000 Lumens
Efficacy: 100 lm/W
Product Size: 360 (Dia) x 175 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 4 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION




HIGH QUALITY ALUMINIUM GRADE



HIGH GRADE POLYCARBONATE DIFFUSER



2 YEARS WARRANTY

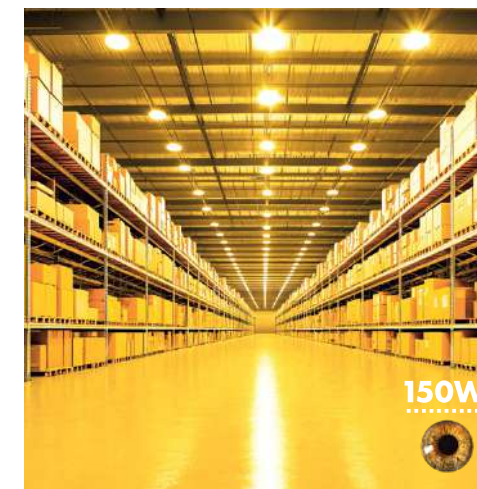



PROCYON

SPIRAL LENS LED Highbay Lights



ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



INGRESS PROTECTION



EXCELLENT CRI



BIS APPROVED

IP66 | RoHS | Recycle | No Lead | No Mercury

50W

Product Code: PPI-PCN-50W-SHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 5000 Lumens
Efficacy: 100 lm/W
Product Size: 255 (Dia) x 165 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 6 Units

100W

Product Code: PPI-PCN-100W-SHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 10000 Lumens
Efficacy: 100 lm/W
Product Size: 255 (Dia) x 165 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 6 Units

150W

Product Code: PPI-PCN-150W-SHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 15000 Lumens
Efficacy: 100 lm/W
Product Size: 340 (Dia) x 130 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 4 Units

200W

Product Code: PPI-PCN-200W-SHB
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 20000 Lumens
Efficacy: 100 lm/W
Product Size: 360 (Dia) x 175 (H) mm
Mount Type: Bracket Mounting / Hanging Hook Screw
Master Pkg.: 4 Units



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY HEAT DISSIPATION



HIGH QUALITY ALUMINIUM GRADE



ELEGANT DESIGN POLYCARBONATE DIFFUSER



2 YEARS WARRANTY



LIGHTING RELATED TERMS



CRI	Colour Rendering Index	CRI is an assessment of how the light source shows object colour "naturally" when compared to a familiar basis of daylight
CCT	Correlated Colour Temperature	CCT defines how the light appears and how it might make us feel
AC	Alternating Current	AC is better suited to travel long distances, this is electricity is delivered from your local power grid to your home
DC	Direct Current	DC voltage is a constant voltage that drives the current in one direction
DOB	Driver on Board	DOB configuration is based on the consideration that LED drivers have been dominantly designed on metal printed circuit board
lm / W	Lumen per Watt	A measurement of luminous efficacy, which is the light output in lumens using one watt of electricity
BEE	Bureau of Energy Efficiency	BEE indicates the energy efficiency of a product and helps consumers make informed choices when purchasing products
BIS	Bureau of Indian Standards	BIS is a quality standard certificate required for manufacturing and selling products in India, ensuring safety, quality, and reliability
RoHS	Restriction of Hazardous Substances	European Standards of Restriction of Hazardous Substances
IP20	Ingress Protection 20	IP20 means an electrical enclosure is protected against solid objects
IP65	Ingress Protection 65	IP65 rating indicating that a product is dust-proof and protected against low-pressure water jets from any direction
IP66	Ingress Protection 66	IP66 rating indicating that a product is dust-proof and protected against powerful water jets from any direction
Dia.	Dimeter	A diameter of a circle is any straight line segment that passes through the centre of the circle and whose endpoints lie on the circle
L x W x H	Length x Width x Height	Product area/ sizes Measurement terms
	Double Insulated Appliance	This protection of appliances marked with this symbol is ensured by double insulation and does not require a safety connection to electrical earth (ground).
	Do not Dispose Trash	This Symbol indictaes prevent pollution and protect the environment, it's crucial to not dispose of trash improperly
	Recycling Process	Recycling is the process of collecting and reprocessing materials, like paper, glass, and plastic to create new products and reduce waste

PRECISION PLASTIC INDUSTRIES PVT. LTD.

19-D, Nand Jyot Industrial Estate, Safed Pool,
Andheri-Kurla Road, Andheri East,
Mumbai-400072. Maharashtra, India.

WE CARE: +91 7715000015 | www.precisionpipes.com

BE THE SOURCE